



Heavy Vehicle National Law (Queensland)

Heavy Vehicle (Mass, Dimension and Loading) National Regulation

Current as at 1 August 2026

Repeal/Expiry Information

The *Statutory Instruments Act 1992*, part 7 does not apply to this legislation—see the *Heavy Vehicle National Law Act 2012*, section 5(1)(j). This means the legislation does not expire.

Reprint note

The Heavy Vehicle (Mass, Dimension and Loading) National Regulation is a law of Queensland under the Heavy Vehicle National Law (Queensland). It is intended a new reprint of the National Regulation will be prepared by the Office of the Queensland Parliamentary Counsel when any change in the National Regulation takes effect.

National scheme legislation may not be entirely consistent with Queensland's current drafting style.

© State of Queensland 2026



This work is licensed under a Creative Commons Attribution 4.0 International License.



Queensland

Heavy Vehicle (Mass, Dimension and Loading) National Regulation

Contents

		Page
Part 1	Preliminary	
1	Short title	7
2	Commencement	7
3	Definitions	7
4	Meaning of section width of tyre	19
5	Application of Regulation in relation to a retractable axle	21
5A	References to axles or axle groups fitted with dual tyres	21
5B	Safer freight vehicles	22
5C	Class 2 heavy vehicles	23
5D	Restricted access vehicles	24
5E	Safer freight combination	24
5F	Specified semitrailer	24
5G	Twinsteer axle groups	25
5H	Prescribed operations requirements for mass	25
5I	Mass alternative compliance accreditation	26
Part 2	Mass requirements	
Division 1	Prescribed mass requirements and related provisions	
6	Prescribed mass requirements	26
7	Mass exceptions	27
8	Limitation imposed by manufacturer's mass limits or other stated limit 27	
9	How to work out the relevant mass for a towing vehicle without a GCM 29	
10	Modified manufacturer's mass limits for a tyre relating to a particular cold inflated pressure	30
Division 3	Additional provisions relating to higher mass limits	
Subdivision 1	HML declarations	

Contents

12	Regulator's power to declare areas and routes for higher mass limits	30
13	Restriction on making HML declaration	31
14	Obtaining consent of road manager	31
15	Requirements about Commonwealth Gazette notice etc.	32
15A	Process for amending a stated map or stated list	33
16	Contravening conditions applying to HML heavy vehicles being used in an area or on a route declared by an HML declaration	35
17	Amendment or cancellation of HML declaration on Regulator's initiative	35
18	Amendment or cancellation of HML declaration on request by relevant road manager	37
19	Immediate suspension	38
Subdivision 2	HML permits	
20	Regulator's power to authorise use of heavy vehicles under higher mass limits in other areas or on other routes	39
21	Application for HML permit	39
22	Restriction on grant of HML permit	39
23	Obtaining consent of road manager	40
24	Conditions of HML permit	40
25	Period for which HML permit applies	41
26	HML permit etc.	41
27	Refusal of application for HML permit	42
28	Contravening conditions of HML permit	42
29	Amendment or cancellation on application by HML permit holder	42
30	Amendment or cancellation of HML permit on Regulator's initiative	44
31	Amendment or cancellation of HML permit on request by relevant road manager	45
32	Immediate suspension of HML permit	47
33	Minor amendment of HML permit	47
34	Return of HML permit	48
35	Replacement of defaced etc. HML permit	48
Part 3	Dimension requirements	
37	Prescribed dimension requirements	48
37A	Warning signals required for rear projection of loads	49
37B	Displaying warning signs on vehicles if not required by dimension exemption	49
Part 4	Loading requirements	
38	Loading requirements	50

Part 4A	Class 2 heavy vehicle authorisation (permits) and mass or dimension exemption permits	
38A	Application of Pt 4A	50
38B	Application for permit	51
38C	Restriction on grant of class 2 heavy vehicle authorisation (permit)	51
38D	Restriction on grant of mass or dimension exemption (permit) . .	52
38E	Conditions of class 2 heavy vehicle authorisation (permits)	52
38F	Conditions of mass or dimension exemption (permits)	52
38G	Granting of permits	53
38H	Amendment or cancellation on request by relevant road manager	54
38I	Immediate suspension of permit	56
38J	Keeping copy of permit while driving	57
Part 5	Exemptions for particular overmass or oversize vehicles	
Division 1	Conditions	
39	Prescribed conditions	57
Division 2	Declaration of areas, roads and routes and major roads	
40	Regulator may make declaration	58
41	Consent of relevant road manager required	59
42	Matters to which Regulator must have regard	59
43	Publication of declaration	60
Part 6	Conditions for grant of mass or dimension authority imposed by relevant road manager	
44	Imposition of road conditions in relation to a class 2 heavy vehicle	60
Part 7	Reviewable decisions	
45	Reviewable decisions	61
Part 8	Transitional provision	
46	Saving of stated map and other matters under section 15	61
Schedule 1	General mass limits	63
Part 1	Imposition of general mass limits	
1	General mass limits	63
2	Mass limits for a single vehicle or combination	63
3	Mass limits for a vehicle with a particular axle space less than 2.5m	66
4	Mass limits for a single axle or axle group	66
5	Mass limits relating to axle spacing generally	66
Part 2	Axle Tables	
Part 3	Axle Mass Deduction Table	

Contents

Schedule 4	Quad axle group mass exception limits	93
1	Quad axle group mass exception limits	93
Schedule 5	Higher mass limits	95
1	Application of higher mass limits to single axle or axle group . . .	95
2	Higher mass limits	96
3	Higher mass limits increased for particular vehicles	98
Schedule 5B	Euro VI vehicle mass transfer allowance	99
1	Euro VI vehicle mass transfer allowance	99
2	Axle spacing	101
Schedule 6	Dimension requirements	103
Part 1	Preliminary	
1	Meaning of rear overhang and rear overhang line	103
2	The load is part of a vehicle's dimensions	105
Part 2	Heavy vehicles	
3	Length—combination or single vehicle	105
4	Length—trailers	106
5	Length—rear overhang	110
6	Length—trailer drawbars	111
6A	Length—front blind spot mirror disregarded	112
6B	Length—indirect vision devices disregarded	112
6C	Length—front end devices disregarded	113
7	Width	113
8	Height	114
9	Ground clearance	114
10	Axle configuration of B-doubles	115
Part 3	Size and projection of loads	
11	Definition for pt 3	116
12	In relation to rear of load	116
13	Front and side projection of load	118
Part 4	Trailer Length Table	
Schedule 7	Loading requirements and loading performance standards	120
1	Loading	120
2	Loading performance standards	121
Schedule 8	Conditions of mass or dimension exemptions applying to class 1 heavy vehicles	123
Part 1	Exemptions granted by Commonwealth Gazette notice	

Division 1	General conditions	
1	Smallest practicable size of unloaded vehicle	123
2	Warning signs and flags	123
3	Warning lights and delineators if load projecting from vehicle . .	124
4	Warning lights for wide vehicles used in daytime	125
5	Side and rear markers and warning lights for oversize vehicles used at night	125
6	Headlights	126
7	Travel restrictions at night	126
8	No travelling if low visibility	127
9	Minimum following distance	127
10	Allowing overtaking	128
11	Assessing routes	128
Division 2	Load-carrying vehicles	
12	Application of Div 2	128
13	Carrying goods in addition to a large indivisible item	129
14	Towing a low loader dolly with an unladen low loader	129
Division 3	Special purpose vehicles	
15	Application of Div 3	130
16	Side lights for travel at night with long front projections	130
17	Rear marking plates and warning patterns	130
18	Prohibition on towing other vehicles	131
Division 4	Agricultural vehicles	
19	Application of Div 4	131
20	Warning devices for agricultural vehicles or combinations	131
21	Pilot vehicle requirements for agricultural vehicles or combinations	132
22	Agricultural vehicles or combinations not to be used on freeway	133
23	Agricultural implements not to carry goods or passengers	133
24	Speed limits for agricultural implements without brakes	133
Division 5	Pilot and escort vehicles	
25	Application of Div 5	133
26	Requirements for a pilot vehicle	134
27	Requirements for an escort vehicle	134
28	Headlights on a pilot or escort vehicle	134
29	Restriction on what a pilot or escort vehicle may carry	135
30	Where a pilot vehicle must be driven	135

Contents

31	Communication between drivers	136
Part 2	Exemptions granted by issuing a permit	
32	Application of Pt 2	136
33	Restriction on towing other vehicles	136
Part 3	All mass or dimension exemptions	
Division 1	Warning lights	
34	Application of Div 1	137
35	Characteristics of warning light	137
36	Visibility of warning lights	138
37	Switch for warning lights to be within easy reach	138
38	Warning lights to be on if required, and off if not	138
Division 2	Warning signs	
Subdivision 1	Preliminary	
39	Application of Div 2	139
Subdivision 2	Class 1 heavy vehicles and pilot vehicles	
40	Application of Sdiv 2	139
41	Face of warning sign	140
42	Other specifications for warning signs	140
Subdivision 3	Class 1 heavy vehicles only	
44	Application of Sdiv 3	141
45	Size of warning sign	141
46	Face of warning sign	141
47	Fitting warning sign	142
Subdivision 4	Pilot vehicles only	
48	Application of Sdiv 4	142
49	Size and shape of warning sign	142
50	Faces of warning sign	143
51	Fitting warning sign	143
Schedule 9	Imposition of road conditions in relation to a class 2 heavy vehicle 145	
Schedule 10	Reviewable decisions	150

Heavy Vehicle (Mass, Dimension and Loading) National Regulation

Editor's note—

The Heavy Vehicle (Mass, Dimension and Loading) National Regulation is a law of Queensland under the Heavy Vehicle National Law (Queensland). It is intended a new reprint of the National Regulation will be prepared by the Office of the Queensland Parliamentary Counsel when any change in the National Regulation takes effect.

Part 1 Preliminary

1 Short title

This Regulation may be cited as the *Heavy Vehicle (Mass, Dimension and Loading) National Regulation*.

2 Commencement

This Regulation commences in a participating jurisdiction on the day on which Chapter 4 of the Law commences in that jurisdiction.

Note—

In this Regulation, a reference to ‘the Law’ is a reference to the Heavy Vehicle National Law. See section 12(2) of Schedule 1 of the Heavy Vehicle National Law.

3 Definitions

In this Regulation—

6-tyred tandem axle group means a tandem axle group fitted with 6 tyres.

ADR (Definitions and Vehicle Categories) means the ADR titled ‘Vehicle Standard (Australian Design Rule—Definitions and Vehicle Categories) 2005’.

agricultural combination means a combination consisting of at least 1 agricultural vehicle.

approved air suspension system, in relation to a bus, means a suspension system in which—

- (a) vertical movement between each axle and the body of the bus is controlled by variations in the air pressure in an air spring; and
- (b) the proportion of the bus's mass borne by the air spring remains substantially constant despite variations in the air pressure in the air spring.

axle group, for Schedule 1, includes a group of at least 5 axles.

centre, of an axle group, has the same meaning as it has in section 4 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

certified road-friendly suspension system means a suspension system certified as a road-friendly suspension system by the Vehicle Safety Standards Branch of the Commonwealth Department of Infrastructure and Transport in accordance with the Vehicle Standards Bulletin Number 11 (revised edition) published by that branch in July 2004.

Notes—

- 1 A copy of the bulletin may be obtained from the website of the Commonwealth Department of Infrastructure and Transport at <www.infrastructure.gov.au>.
- 2 At the time of publication the department was called the Department of Transport and Regional Services.

complying anti-lock braking system, for an eligible 2-axle bus or an eligible 3-axle bus, means an anti-lock braking system that complies with—

- (a) if a version of ADR 35 later than ADR 35/01 applied to the bus at the bus's date of manufacture—the version of ADR 35 that applied to the bus at the bus's date of manufacture or a later version of ADR 35; or
- (b) otherwise—ADR 35/01 or a later version of ADR 35.

complying bus means a bus with 2 or 3 axles, 1 of which is a steer axle, that is fitted with an approved air suspension system and meets—

- (a) the emergency exit specifications in ADR 44; and
- (b) the rollover strength specifications in ADR 59; and
- (c) the occupant protection specifications in ADR 68.

complying steer axle vehicle means a heavy vehicle with a single steer axle if the vehicle has all of the following—

- (a) an engine complying with the emission control requirements contained in—
 - (i) ADR 80/01 or a later version of ADR 80; or
 - (ii) if a version of ADR 80 later than ADR 80/01 applied to the vehicle at the vehicle's date of manufacture—the version of ADR 80 that applied to the vehicle at the vehicle's date of manufacture or a later version of ADR 80;
- (b) a front underrun protection device that complies with UN ECE Regulation No. 93 or ADR 84;
- (c) a cabin that complies with UN ECE Regulation No. 29;
- (d) appropriately rated tyres, axle and suspension to permit 6.5t on the steer axle;
- (e) a GVM of 15t or more.

dog trailer has the same meaning as it has in section 4 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

drawbar has the same meaning as it has in section 4 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

driving axle, in relation to a vehicle, means an axle driven by the vehicle's engine.

dual-drive tandem axle group means a tandem axle group consisting of 2 axles, both of which are a driving axle for a vehicle.

eligible 2-axle bus—

- 1 A bus is an *eligible 2-axle bus* if the bus—
 - (a) was manufactured before 1 January 2016; and
 - (b) has 2 axles, 1 of which is a single-drive axle fitted with dual tyres; and
 - (c) is 1 of the following—
 - (i) a complying bus;
 - (ii) an ultra-low floor bus;
 - (iii) a bus, other than an ultra-low floor bus, that is authorised to carry standing passengers;
 - (iv) a bus, other than an articulated bus, whose length is more than 12.5m but not more than 14.5m; and
 - (d) is fitted with—
 - (i) a complying anti-lock braking system; or
 - (ii) a vehicle stability function that complies with the version of UN ECE Regulation No. 13 that applied to the bus at the bus's date of manufacture or a later version of UN ECE Regulation No. 13.

Note—

A vehicle stability function is also known as electronic stability control or ESC.

- 2 A bus is also an *eligible 2-axle bus* if the bus—
 - (a) was manufactured on or after 1 January 2016; and
 - (b) has 2 axles, 1 of which is a single-drive axle fitted with dual tyres; and
 - (c) is 1 of the following—
 - (i) a complying bus;
 - (ii) an ultra-low floor bus;
 - (iii) a bus, other than an ultra-low floor bus, that is authorised to carry standing passengers;

- (iv) a bus, other than an articulated bus, whose length is more than 12.5m but not more than 14.5m; and
- (d) is fitted with—
 - (i) a complying anti-lock braking system; and
 - (ii) either—
 - (A) an eligible electronic braking system; or
 - (B) a vehicle stability function that complies with the version of UN ECE Regulation No. 13 that applied to the bus at the bus's date of manufacture or a later version of UN ECE Regulation No. 13.

eligible 3-axle bus—

- 1 A bus is an *eligible 3-axle bus* if the bus—
 - (a) was manufactured before 1 January 2015; and
 - (b) has 3 axles, including a rear tandem axle group fitted with single tyres on 1 axle and dual tyres on the other axle; and
 - (c) is 1 of the following—
 - (i) a complying bus;
 - (ii) a bus, other than an articulated bus, whose length is more than 12.5m but not more than 14.5m;
 - (iii) an ultra-low floor bus;
 - (iv) a bus, other than an ultra-low floor bus, that is authorised to carry standing passengers under an Australian road law; and
 - (d) is fitted with—
 - (i) a complying anti-lock braking system; or
 - (ii) a vehicle stability function that complies with the version of UN ECE Regulation No.

13 that applied to the bus at the bus's date of manufacture or a later version of UN ECE Regulation No. 13.

Note—

A vehicle stability function is also known as electronic stability control or ESC.

- 2 A bus is also an *eligible 3-axle bus* if the bus—
- (a) was manufactured on or after 1 January 2015; and
 - (b) has 3 axles, including a rear tandem axle group fitted with single tyres on 1 axle and dual tyres on the other axle; and
 - (c) is 1 of the following—
 - (i) a complying bus;
 - (ii) a bus, other than an articulated bus, whose length is more than 12.5m but not more than 14.5m;
 - (iii) an ultra-low floor bus;
 - (iv) a bus, other than an ultra-low floor bus, that is authorised to carry standing passengers under an Australian road law; and
 - (d) is fitted with a complying anti-lock braking system; and
 - (e) for a type of bus mentioned in paragraph (c)(i) or (ii)—is fitted with—
 - (i) an eligible electronic braking system; or
 - (ii) a vehicle stability function that complies with the version of UN ECE Regulation No. 13 that applied to the bus at the bus's date of manufacture or a later version of UN ECE Regulation No. 13.

eligible electronic braking system, for an eligible 2-axle bus or an eligible 3-axle bus, means a service brake system operating on the wheels of the bus that—

- (a) is primarily activated by electronic means; and
- (b) has a secondary means of activation if the electronic means of activation fails.

Example of secondary means of activation—
pneumatic activation

Euro VI vehicle (complying steer axle)—

- (a) means a heavy motor vehicle with a single steer axle that—
 - (i) has an engine complying with the requirements about emission control contained in ADR 80/04 or a later version of ADR 80; and
 - (ii) has a front underrun protection device that complies with ADR 84, unless ADR 84 provides otherwise; and
 - (iii) has a cabin that complies with UN ECE Regulation No. 29; and
 - (iv) has appropriately rated tyres, axle and suspension for the mass limit on the steer axle as stated by the vehicle's manufacturer; and
 - (v) has a GVM of 15t or more; but
- (b) does not include a bus.

Euro VI vehicle mass transfer allowance means the mass transfer allowance stated in section 1 of Schedule 5B.

Euro VI vehicle (single steer axle)—

- (a) means a heavy motor vehicle with a single steer axle, other than a complying steer axle vehicle, that—
 - (i) has an engine complying with the requirements about emission control contained in ADR 80/04 or a later version of ADR 80; and
 - (ii) has appropriately rated tyres, axle and suspension for the mass limit on the steer axle as stated by the vehicle's manufacturer; but

- (b) does not include a bus.

Euro VI vehicle (twinsteer)—


- (a) means a heavy motor vehicle with a twinsteer axle group that—
 - (i) has an engine complying with the requirements about emission control contained in ADR 80/04 or a later version of ADR 80; and
 - (ii) has a load-sharing suspension system for the axle group; and
 - (iii) has appropriately rated tyres, axles and suspension for the mass limit on the axle group as stated by the vehicle's manufacturer; but

- (b) does not include a bus.


front articulation point, in relation to a trailer used in a heavy combination, means the point of articulation at the front of the trailer, which may, and may only, be any of the following—

- (a) the vertical axis of a kingpin used with a fifth wheel coupling;
- (b) the vertical axis of rotation of a fifth wheel coupling;
- (c) the vertical axis of rotation of a turntable;
- (d) in relation to a trailer that is a dog trailer, the vertical axis of rotation of the front axle group, or single axle, of the trailer;
- (e) in relation to a trailer that is a semitrailer or tag trailer, the imaginary vertical line passing through the pivot point for a coupling fitted to the semitrailer or tag trailer.

Examples—

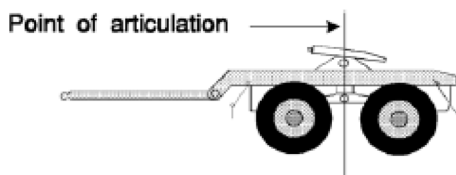

**Point of articulation—fifth wheel coupling on a converter dolly
(forming the front axle group of a dog trailer)**

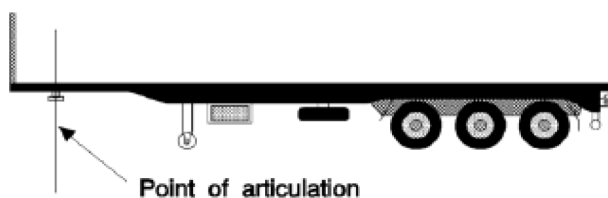

Point of articulation—kingpin fitted to a fifth wheel coupling

general mass limits has the meaning given by section 6(2).

higher mass limits means, in relation to a heavy vehicle to which the higher mass limits mentioned in section 1 of Schedule 5 apply as provided by the section, the higher mass limits stated in section 2 of Schedule 5.

HML area, in relation to an HML heavy vehicle, means an area within which the vehicle is authorised to be used under the higher mass limits under—

- (a) an HML declaration; or
- (b) an HML permit.

HML declaration has the meaning given by section 12(2).

HML heavy vehicle means a heavy vehicle to which the higher mass limits mentioned in section 1 of Schedule 5 apply as provided by the section.

HML permit has the meaning given by section 20(2).

HML route, in relation to an HML heavy vehicle, means a route on which the vehicle is authorised to be used under the higher mass limits under—

- (a) an HML declaration; or
- (b) an HML permit.

jinker means a trailer—

- (a) comprising an axle or axle group built to support a load that is being transported by the trailer and its towing vehicle; and
- (b) connected to the towing vehicle by a pole or cable or the load itself, if any.

LED technology means light-emitting diode technology.

light vehicle standards means the standards with which a vehicle other than a heavy vehicle must comply before it may be registered under a law of a participating jurisdiction providing for the registration of vehicles other than heavy vehicles.

load-carrying vehicle means a heavy vehicle carrying, or designed for the purpose of carrying, a large indivisible item, including, for example, a combination including a low loader.

load-sharing suspension system, of an axle group, means a suspension system—

- (a) built to divide the load between the tyres on the group so no tyre carries a mass more than 10% above the mass it would carry if the load were divided equally; and
- (b) with effective damping characteristics on all axles of the group.

low loader has the same meaning as it has in section 116(4) of the Law.

low loader dolly means a device for distributing mass that—

- (a) is usually coupled between a prime mover and low loader; and
- (b) consists of a rigid frame of a gooseneck shape; and

- (c) does not directly carry any load; and
- (d) is equipped with 1 or more axles, a kingpin and a fifth wheel coupling.

major road means a road declared to be a major road for this Regulation under Division 2 of Part 5.

mass alternative compliance accreditation means an alternative compliance accreditation granted in relation to the prescribed operations requirements specified in section 5H.

mass exception has the meaning given by section 6(3).

police vehicle means a motor vehicle driven by a police officer in the course of the police officer's duty.

quad axle group mass exception limits means the quad axle group mass exception limits stated in section 1 of Schedule 4.

radial ply tyre means a radial ply tyre within the meaning of ADR (Definitions and Vehicle Categories).

rear overhang has the meaning given by section 1 of Schedule 6.

rear overhang line has the meaning given by section 1 of Schedule 6.

relevant participating jurisdiction, in relation to an HML declaration, means a participating jurisdiction in which the whole or part of an area or route the subject of the declaration is situated.

relevant road manager, in relation to an HML declaration or HML permit, means a road manager for a road in an area or on a route the subject of the declaration or permit.

retractable axle means an axle that can be raised so the tyres on it do not touch the ground.

road manager consent provisions means Division 2 of Part 4.7 of the Law.

section width, of a tyre, has the meaning given by section 4.

single axle group means a group of 2 or more axles in which the horizontal distance between the centre-lines of the outermost axles is less than 1m.

single-drive axle means a single axle that transmits automotive power.

single-drive tandem axle group means a tandem axle group consisting of 2 axles, only 1 of which is a driving axle for a vehicle.

special purpose vehicle has the same meaning as it has in section 116(4) of the Law.

steerable axle means a single axle that connects the wheels of a vehicle to a steering mechanism for the vehicle.

steer axle means the front steerable axle used to steer the vehicle.

tag trailer means a trailer—

- (a) with 1 axle group or a single axle towards the rear of its load-carrying surface; and
- (b) connected to a towing vehicle by a drawbar.

transport enforcement vehicle means a motor vehicle marked as a vehicle of a road authority for a participating jurisdiction and used by the authority for the purposes of investigating or prosecuting an offence against an Australian road law.

turntable has the same meaning as it has in section 4 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

ultra-low floor bus means a bus that—

- (a) has stairless entry; and
- (b) is accessible to wheelchairs; and
- (c) is authorised to carry standing passengers.

UN ECE Regulation means an addendum to the United Nations Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts done at Geneva on 20 March 1958.

urban area means an area declared to be an urban area for this Regulation under Division 2 of Part 5.

warning light, in Schedule 8, means a warning light complying with Division 1 of Part 3 of Schedule 8.

warning pattern means a pattern covering an area of at least 0.16m² and consisting of diagonal stripes at least 150mm wide and alternately coloured—

- (a) red and white; or
- (b) black and white.

warning sign, in Schedule 8, means a warning sign complying with Division 2 of Part 3 of Schedule 8.


wheelbase, in relation to a vehicle, means the distance from the centre line of the vehicle's foremost axle to the rear overhang line.

yellow, in relation to a light, includes amber.

4 Meaning of section width of tyre


- (1) The section width of a tyre is the tyre's width worked out under subsections (2) to (4).
- (2) The tyre width of a radial ply tyre is the number of millimetres marked on the tyre in the position labelled 'section width in mm' in the following diagram—

[s 4]

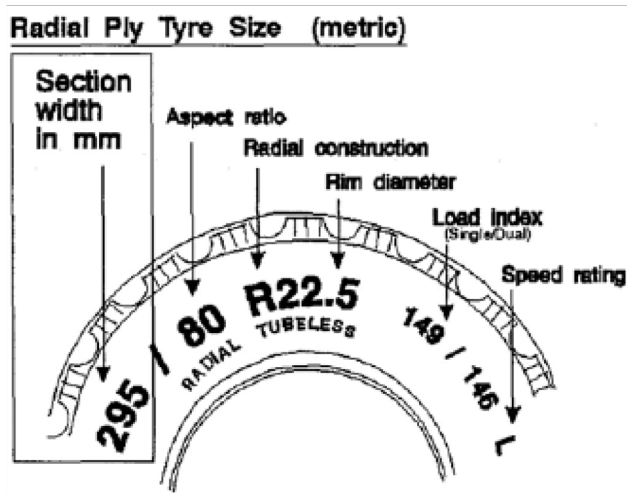

Position of section width marking on radial ply tyre

- (3) The tyre width of a bias-belted tyre is the number of millimetres equal to 25.4 times the number marked on the tyre in the position labelled ‘width code in inches’ in the following diagram—

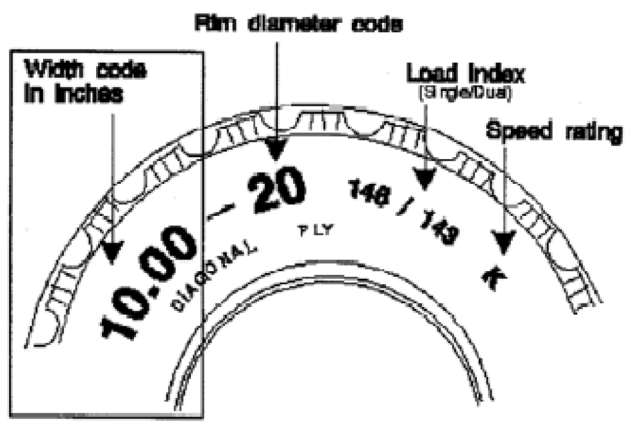

Position of width code marking on bias-belted tyre

- (4) The tyre width for another type of tyre is the width of the part of the tyre that normally comes into contact with the road surface.
- (5) In this section—
bias-belted tyre means a bias-belted tyre within the meaning of ADR (Definitions and Vehicle Categories).

5 Application of Regulation in relation to a retractable axle

- (1) This section applies for the purpose of applying a provision of this Regulation in relation to a heavy vehicle that has a retractable axle if, in the circumstances to which the provision is being applied, the axle is retracted.
- (2) If the provision imposes mass limits on a single axle or axle group—
 - (a) the mass limits do not apply to the retracted axle; and
 - (b) the retractable axle is to be disregarded in determining whether more than 1 axle is a particular type of axle group.
- (3) If the provision imposes mass limits relating to axle spacing of a heavy vehicle, the retracted axle is to be disregarded in determining the axle spacings of the vehicle.
- (4) If the provision imposes dimension requirements in relation to distances measured by reference to a single axle or axle group, the retracted axle is to be disregarded.
- (5) In this section—
retracted, in relation to an axle, means a retractable axle that is raised so that the wheels of the axle do not touch the ground.

5A References to axles or axle groups fitted with dual tyres

- (1) A reference in this Regulation to an axle fitted with dual tyres includes an axle fitted with 2 or more sets of dual tyres.

- (2) A reference in this Regulation to an axle group fitted with dual tyres includes an axle group in which an axle is fitted with 2 or more sets of dual tyres.
- (3) For subsections (1) and (2), an axle is fitted with—
 - (a) a set of dual tyres, consisting of 4 tyres in total, if dual tyres are fitted to each end of the axle; and
 - (b) 2 or more sets of dual tyres if dual tyres are fitted to each end of the axle and at positions along the axle between the tyres fitted to each end of the axle.

5B Safer freight vehicles

- (1) The requirements imposed by this section are prescribed for the purposes of the definition of *safer freight vehicle* in section 153A(2) of the Law.
- (2) The heavy vehicle, together with its load, must not be—
 - (a) higher than 4.3m; or
 - (b) wider than 2.55m; or
 - (c) longer than 12.5m.
- (3) The heavy vehicle must also comply with the requirements of the following, so far as they are applicable—
 - (a) ADR 14/03 or a later version of ADR 14;
 - (b) ADR 35/07 or a later version of ADR 35;
 - (c) ADR 97/00 or a later version of ADR 97;
 - (d) ADR 99/00 or a later version of ADR 99.
- (4) The heavy vehicle must also comply with the requirements of ADR 105/00, or a later version of ADR 105, so far as they are applicable, if the heavy vehicle has a GVM of more than 8t.
- (5) If the heavy vehicle is a truck, the heavy vehicle must also—
 - (a) comply with ADR 106/00 or a later version of ADR 106; and

- (b) be fitted with conspicuity markings that comply with ADR 13/00 or a later version of ADR 13.

5C Class 2 heavy vehicles

- (1) For the purposes of the definition of *class 2 heavy vehicle* in section 136 of the Law, the requirements are that—

- (a) the heavy vehicle—
 - (i) complies with the prescribed mass requirements and prescribed dimension requirements applying to it; and
 - (ii) is—
 - (A) a B-double; or
 - (B) a road train; or
 - (C) a bus, other than an articulated bus, that is longer than 12.5m; or
 - (D) a combination designed and built to carry vehicles on more than 1 deck that, together with its load, is longer than 20m or higher than 4.3m; or
 - (E) a motor vehicle, or a combination, that is higher than 4.3m and is built to carry cattle, sheep, pigs or horses; or
- (b) the heavy vehicle is a PBS vehicle other than a specified PBS vehicle.

- (2) In this section—

specified PBS vehicle means a PBS vehicle that—

- (a) is not a bus; and
- (b) is not longer than 20m; and
- (c) is the subject of a current PBS vehicle approval at performance level 1; and
- (d) complies with the PBS vehicle approval; and

- (e) complies with the general mass limits for the vehicle, regardless of whether the PBS vehicle approval authorises a higher mass limit.

Note—

General mass limits for a vehicle may be included in prescribed mass requirements under section 95 of the Law.

5D Restricted access vehicles

For the purposes of the definition of *restricted access vehicle* in section 153A(2) of the Law, the requirements are that the heavy vehicle, together with its load, is—

- (a) higher than 4.3m; or
- (b) wider than 2.5m; or
- (c) longer than—
 - (i) if a single vehicle other than an articulated bus—12.5m; or
 - (ii) if an articulated bus—18m; or
 - (iii) if a combination—20m.

5E Safer freight combination

For the purposes of the definition of *safer freight combination* in section 153A(2) of the Law, the requirements are that the combination—

- (a) includes a safer freight vehicle, together with its load, that is the only component vehicle wider than 2.5m; and
- (b) is not higher than 4.3m; and
- (c) is not longer than 20m.

5F Specified semitrailer

For the purposes of the definition of *specified semitrailer* in section 153A(2) of the Law, the requirements are that—

- (a) the semitrailer is not a PBS vehicle; and
- (b) the semitrailer has an air suspension system with effective dampers fitted; and
- (c) the semitrailer has a deck height not higher than 1.2m for at least 50% of its deck length; and
- (d) if the semitrailer is in a combination—the combination—
 - (i) consists only of—
 - (A) a prime mover towing a single semitrailer attached to the prime mover by a fifth wheel coupling; or
 - (B) a B-double; or
 - (C) a B-triple; and
 - (ii) has a mass not more than 90% of the prescribed mass requirement for the combination.

5G Twinsteer axle groups

- (1) The requirements imposed by this section are prescribed for the purposes of the definition of *twinsteer axle group* in section 5 of the Law.
- (2) The group of 2 axles must—
 - (a) have single tyres; and
 - (b) be fitted to a motor vehicle; and
 - (c) be connected to the same steering mechanism.
- (3) The horizontal distance between the centre-line of the 2 axles must be at least 1m but not more than 2.5m.

5H Prescribed operations requirements for mass

For the purposes of section 457 of the Law, the general mass limits applying under section 95(2)(c) of the Law are prescribed operations requirements.

5I Mass alternative compliance accreditation

For the purposes of section 461(6)(a)(ii) of the Law, the mass limits allowed under mass alternative compliance accreditation must comply with the limits specified in Schedule 5.

Note—

Mass limits allowed under mass alternative compliance accreditation apply to a person only when the person operating under the accreditation is eligible for and complies with the requirements in Schedule 5 for higher mass limits.

Part 2 Mass requirements

Division 1 Prescribed mass requirements and related provisions

6 Prescribed mass requirements

- (1) The mass requirements imposed by this Division and Schedules 1 to 5B are prescribed mass requirements for the purposes of section 95 of the Law.
- (2) Schedule 1 imposes mass limits that apply generally to a heavy vehicle or to components of a heavy vehicle (the *general mass limits*).
- (3) The general mass limits are subject to exceptions (each a *mass exception*) provided under section 7 and Schedules 2 to 5B in relation to a heavy vehicle or a component of a heavy vehicle.

Note—

A component, for example, may be a vehicle towing another vehicle, a vehicle being towed, a single axle, an axle group or a tyre.

- (4) Sections 8 to 10 impose requirements based on manufacturer's mass limits or other mass limits.
- (5) The prescribed mass requirements mentioned in this section apply in relation to a heavy vehicle or component whether or not the vehicle is loaded.

Note—

The general mass limits and mass exceptions make no distinction between a loaded or unloaded vehicle or component because an essential consideration is the mass that is applied to a road on which a heavy vehicle or component is being used.

7 Mass exceptions

- (1) The mass exceptions are as follows—
 - (b) the quad axle group mass exception limits;
 - (c) the higher mass limits;
 - (e) the Euro VI vehicle mass transfer allowance.

Note—

See Schedules 4 to 5B for details of the mass exceptions.

- (2) A mass exception does not apply if a condition of the mass exception imposed under this Regulation is contravened.

8 Limitation imposed by manufacturer's mass limits or other stated limit

- (1) Subsection (2) applies if the general mass limits or a mass exception provides for a mass limit for a heavy vehicle in excess of—
 - (a) the manufacturer's mass limits; or
 - (b) the limit stated in subsection (3) for the purposes of this paragraph.
- (2) The manufacturer's mass limits or the limit stated in subsection (3) applies and the general mass limits or mass exception does not apply.
- (3) For the purposes of subsection (1)(b), the limit is, for a combination—
 - (a) the towing vehicle of which does not have a GCM; and
 - (b) fitted with a single-drive axle, single-drive tandem axle group or dual-drive tandem axle group;

the mass, in kilograms, worked out under section 9.

- (4) Subsection (5) applies if the general mass limits or a mass exception provides for a mass limit for a component of a heavy vehicle in excess of the manufacturer's mass limits for the component.
- (5) The manufacturer's mass limits for the component applies and the general mass limits or mass exception does not apply.
- (6) Subsection (7) applies if there is no general mass limits or mass exception applied to a component of a heavy vehicle under this Part other than subsection (7) and there is a manufacturer's mass limits for the component.
- (7) The manufacturer's mass limits for the component applies to the component.
- (8) In this section—

manufacturer's mass limits—

- (a) in relation to a heavy vehicle, means—
 - (i) the mass limits derived from the rating set for the heavy vehicle by the vehicle's manufacturer, including the GVM or GCM stated by the manufacturer of the heavy vehicle; or
 - (ii) if a registration authority has, under an Australian road law, specified the total maximum loaded mass for the heavy vehicle and any vehicles it may lawfully tow—that mass; or
 - (iii) if a registration authority has, under an Australian road law, specified the vehicle's maximum loaded mass—that mass; or
- (b) in relation to a component of a heavy vehicle, subject to section 10, means the mass limits derived from the rating set for the component by the component's manufacturer.

9 How to work out the relevant mass for a towing vehicle without a GCM

- (1) For the purposes of section 8(3), if the towing vehicle of a combination does not have a GCM and is fitted with a single-drive axle, single-drive tandem axle group or dual-drive tandem axle group, the mass, in kilograms, is worked out by using the following formula—

$$M = \frac{K \times TR \times R \times T}{16}$$

- (2) In the formula under subsection (1)—
- (a) **M** means mass in kilograms; and
 - (b) **K** means the following—
 - (i) if the towing vehicle is fitted with a single-drive axle—0.055;
 - (ii) if the towing vehicle is fitted with a single-drive tandem axle group—0.053;
 - (iii) if the towing vehicle is fitted with a dual-drive tandem axle group—0.051; and
 - (c) **TR** means the number of tyre revolutions per kilometre, stated by the manufacturer, of the tyres fitted to the towing vehicle's driving axles; and
 - (d) **R** means the overall gear reduction between the towing vehicle's engine and the wheels on the vehicle's driving axles; and
 - (e) **T** means the towing vehicle's maximum engine net torque in newton-metres.

Example—

A towing vehicle does not have a GCM if—

- (a) the total maximum mass for the vehicle and any vehicles it may lawfully tow at any given time is not stated by the vehicle's manufacturer on the vehicle's identification plate or another place on the vehicle; and
- (b) a registration authority has not, under an Australian road law, specified the total maximum loaded mass for the vehicle and any

vehicles it may lawfully tow at any given time because the vehicle has not been the subject of an application for registration under an Australian road law or an application for an unregistered heavy vehicle permit under the Law.

10 Modified manufacturer's mass limits for a tyre relating to a particular cold inflated pressure

- (1) This section applies for the purposes of section 8.
- (2) The manufacturer's mass limits for a tyre are the manufacturer's mass limits for the tyre determined at a cold inflation pressure of not more than—
 - (a) for a radial ply tyre—825kPa; or
 - (b) for another type of tyre—700kPa.

Example—

The manufacturer's mass limits for a radial tyre are—

- at a cold inflated pressure of 200–900kPa—5t
- at a cold inflated pressure greater than 900kPa—6t.

Because the latter mass limit (6t) only applies at a cold inflated pressure above the threshold value of 825kPa mentioned in paragraph (a), the applicable manufacturer's mass limits for the tyre is 5t.

Division 3 Additional provisions relating to higher mass limits

Subdivision 1 HML declarations

12 Regulator's power to declare areas and routes for higher mass limits

- (1) The Regulator may, by Commonwealth Gazette notice complying with section 15, declare an area in which or a route on which stated types of HML heavy vehicles are authorised to be used under the higher mass limits.
- (2) A declaration under subsection (1) is an *HML declaration*.

13 Restriction on making HML declaration

- (1) The Regulator may make an HML declaration only if—
 - (a) the Regulator is satisfied the use of the stated types of HML heavy vehicles under the higher mass limits in the area or on the route will not pose a significant risk to public safety; and
 - (b) each relevant road manager for the declaration has consented to the making of the declaration; and
 - (c) the Regulator is satisfied all other consents required for the declaration have been obtained or given.
- (2) In deciding whether to make an HML declaration, the Regulator must have regard to the approved guidelines for making HML declarations.

14 Obtaining consent of road manager

- (1) The road manager consent provisions apply in relation to obtaining consent of a relevant road manager for an HML declaration.
- (2) For the purposes of subsection (1)—
 - (a) a reference in the road manager consent provisions to a mass or dimension authority is taken to be a reference to an HML declaration; and
 - (b) a reference in the road manager consent provisions to the grant of a mass or dimension authority is taken to be a reference to the making of an HML declaration; and
 - (c) a reference in the road manager consent provisions to a relevant road manager for a mass or dimension authority is taken to be a reference to a relevant road manager for an HML declaration.
- (3) A relevant road manager for an HML declaration may consent to the making of the declaration subject to the condition that stated intelligent access conditions are imposed on the use of a stated type of HML heavy vehicle under the higher mass limits in an area or on a route to which the declaration applies.

- (4) If a relevant road manager for an HML declaration consents to the making of the declaration as mentioned in subsection (3)—
 - (a) the relevant road manager must give the Regulator written reasons for the road manager's decision to give consent to the making of the declaration subject to the condition; and
 - (b) the Regulator must include the stated intelligent access conditions in the declaration.

15 Requirements about Commonwealth Gazette notice etc.

- (1) A Commonwealth Gazette notice for an HML declaration must state the following—
 - (a) that HML heavy vehicles of a stated type are authorised to be used under the higher mass limits in the area or on the route stated in the notice;
 - (b) the intelligent access conditions required by a relevant road manager for the declaration under section 14(3).
- (2) Without limiting subsection (1)(a), the declaration may state the areas or routes under the subsection by—
 - (a) applying by reference a stated map or stated list, not in the notice, prepared and published by the relevant road authority or the Regulator; and
 - (b) referring to the areas or routes shown on the stated map or stated list.
- (3) If the declaration applies a stated map or stated list—
 - (a) the Regulator may amend the stated map or stated list prepared and published by it and the relevant road authority may amend the stated map or stated list prepared and published by it, but only by omitting, varying or extending the areas or routes mentioned in subsection (2)(b), including by adding additional areas or routes; and

- (b) the Regulator must ensure a copy of the stated map or stated list as in force from time to time is—
 - (i) made available for inspection, without charge, during normal business hours at each office of the Regulator; and
 - (ii) published on the Regulator’s website or published by way of a reference or link published on the Regulator’s website.

Note—

The Regulator must publish a stated map or stated list whether the Regulator or a relevant road authority originally prepared and published it as mentioned in subsection (2).

- (4) Despite subsection (3)(a), a road authority may only amend a map or list in a way that affects a particular road if—
 - (a) the road authority is the road manager for the road; or
 - (b) the road authority is not the road manager for the road and has been advised by the Regulator that the Regulator has obtained the consent of the road manager for the amendment.
- (5) The Regulator must publish a copy of the notice on the Regulator’s website.
- (6) In this section—

relevant road authority, for an HML declaration, means the road authority for the participating jurisdiction in which the road likely to be travelled under the declaration is situated.

15A Process for amending a stated map or stated list

- (1) This section applies to the amendment of a stated map or stated list mentioned in section 15.
- (2) For the purpose of an amendment by the Regulator only adding an additional area or route to a stated map or stated list—
 - (a) section 13 applies; and

- (b) the road manager consent provisions as applied under section 14, and section 14, apply; and
 - (c) sections 17 and 18 do not apply.
- (3) For the purpose of subsection (2), sections 13 and 14 apply as if—
 - (a) a reference to the making of an HML declaration were a reference to the adding of the additional area or route; and
 - (b) a reference to the relevant road manager for an HML declaration were a reference to the relevant road manager for the declaration that applies the stated map or list.
- (4) For the purpose of an amendment by the relevant road authority only adding an additional area or route to a stated map or stated list, sections 13, 14, 17 and 18 do not apply.
- (5) For the purpose of an amendment by the Regulator or a relevant road authority if subsections (2) to (4) do not apply, sections 17 and 18 apply.
- (6) For the purpose of subsection (5), sections 17 and 18 apply as if—
 - (a) a reference to the amendment of an HML declaration were a reference to the amendment of the stated map or stated list; and
 - (b) a reference to the Regulator were a reference to the Regulator or the relevant road authority, whichever is amending the stated map or stated list; and
 - (c) a reference to the relevant road manager for an HML declaration were a reference to the relevant road manager for the declaration that applies the stated map or stated list.

16 Contravening conditions applying to HML heavy vehicles being used in an area or on a route declared by an HML declaration

- (1) This section applies if an HML declaration states that the use of a stated type of HML heavy vehicle under the higher mass limits in an area or on a route to which the declaration applies is subject to intelligent access conditions.
- (2) A person must not use an HML heavy vehicle of the type, or permit an HML heavy vehicle of the type to be used, under the higher mass limits in an area or on a route to which the HML declaration applies unless—
 - (a) the vehicle is equipped for monitoring the relevant monitoring matters, by an approved intelligent transport system used by an intelligent access service provider; and
 - (b) the vehicle is covered by an intelligent access agreement.

Maximum penalty—\$4000.

- (3) In this section—

intelligent access agreement has the meaning given by section 403 of the Law.

relevant monitoring matters means the matters mentioned in section 402(2)(a)(i) or (ii) of the Law for the vehicle.

17 Amendment or cancellation of HML declaration on Regulator's initiative

- (1) It is a ground for amending or cancelling a HML declaration if the Regulator is satisfied the use of HML heavy vehicles under the higher mass limits in an area or on a route to which an HML declaration applies has caused, or is likely to cause, a significant risk to public safety.
- (2) If the Regulator considers a ground exists to amend or cancel the HML declaration, the Regulator may amend or cancel the HML declaration by complying with subsections (3) to (5).

- (3) The Regulator must publish a public notice—
 - (a) stating the Regulator believes a ground exists to amend or cancel the HML declaration; and
 - (b) outlining the facts and circumstances forming the basis for the belief; and
 - (c) stating the action the Regulator is proposing to take under this section (the *proposed action*); and
 - (d) inviting persons who will be affected by the proposed action to make, within a stated time of at least 14 days after the Commonwealth Gazette notice is published, written representations about why the proposed action should not be taken.
- (4) If, after considering all written representations made under subsection (3)(d), the Regulator still considers a ground exists to take the proposed action, the Regulator may—
 - (a) if the proposed action was to amend the HML declaration—amend the declaration, in a way that is not substantially different from the proposed action, to change the area or route to which it applies; or
 - (b) if the proposed action was to cancel the HML declaration—
 - (i) amend the declaration to change the area or route to which it applies; or
 - (ii) cancel the declaration.
- (5) The Regulator must publish a public notice of the amendment or cancellation.
- (6) The amendment or cancellation takes effect—
 - (a) 28 days after the Commonwealth Gazette notice is published under subsection (5); or
 - (b) if a later time is stated in the Commonwealth Gazette notice, at the later time.

18 Amendment or cancellation of HML declaration on request by relevant road manager

- (1) This section applies if a relevant road manager for an HML declaration is satisfied the use of HML heavy vehicles under the higher mass limits in an area or on a route to which the declaration applies (and in or on which a road for which the relevant road manager is a road manager is situated)—
 - (a) has caused, or is likely to cause, damage to road infrastructure; or
 - (b) has had, or is likely to have, an adverse effect on the community arising from noise, emissions or traffic congestion or from other matters stated in the approved guidelines; or
 - (c) has posed, or is likely to pose, a significant risk to public safety arising from heavy vehicle use that is incompatible with road infrastructure or traffic conditions.
- (2) The road manager may ask the Regulator to—
 - (a) amend the declaration to—
 - (i) change the area or route to which it applies; or
 - (ii) amend the intelligent access conditions applying to HML heavy vehicles used under the higher mass limits in an area or on a route to which the declaration applies; or
 - (b) cancel the declaration.
- (3) The Regulator must comply with the request.
- (4) However, if consent to the grant of the declaration was given by a road authority under section 163 of the Law as applied under section 14—
 - (a) the Regulator may refer the request to the road authority; and
 - (b) if the road authority gives the Regulator its written approval of the request, the Regulator must comply with the request; and

- (c) if the road authority does not give written approval of the road manager's request within 28 days after the referral is made, the Regulator—
 - (i) must not comply with the request; and
 - (ii) must notify the road manager that the road authority has not given its written approval of the request and, as a result, the Regulator must not comply with it.
- (5) The Regulator must publish a public notice of the amendment or cancellation.
- (6) The amendment or cancellation takes effect—
 - (a) 28 days after the Commonwealth Gazette notice is published under subsection (5); or
 - (b) if a later time is stated in the Commonwealth Gazette notice, at the later time.

19 Immediate suspension

- (1) This section applies if—
 - (a) the Regulator considers a ground exists to cancel an HML declaration; or
 - (b) the Regulator reasonably believes it is necessary to suspend the declaration immediately to prevent or minimise serious harm to public safety or significant damage to road infrastructure.
- (3) The Regulator may, by public notice, immediately suspend the declaration until the earliest of the following—
 - (a) the end of 56 days after the day the public notice is published;
 - (b) the Regulator publishes a notice under section 17(5) or 18(5) and the amendment or cancellation takes effect under section 17(6) or 18(6);
 - (c) the Regulator cancels the suspension by public notice.

- (4) The suspension, and (where relevant) the cancellation of the suspension, takes effect immediately after the Commonwealth Gazette notice is published under subsection (3).
- (5) This section applies despite sections 17 and 18.

Subdivision 2 HML permits

20 Regulator's power to authorise use of heavy vehicles under higher mass limits in other areas or on other routes

- (1) The Regulator may, by giving a person a permit as mentioned in section 26, authorise, for a period of not more than 3 years, the use of an HML heavy vehicle under the higher mass limits in stated areas or on stated routes.
- (2) A permit under subsection (1) is an *HML permit*.
- (3) An HML permit may apply to 1 or more HML heavy vehicles.

21 Application for HML permit

- (1) A person may apply to the Regulator for an HML permit.
- (2) The application must be—
 - (a) in the approved form; and
 - (b) accompanied by the prescribed fee for the application.
- (3) The Regulator may, by notice given to the applicant, require the applicant to give the Regulator any additional information the Regulator reasonably requires to decide the application.

22 Restriction on grant of HML permit

- (1) The Regulator may grant an HML permit for an HML heavy vehicle only if—
 - (a) the Regulator is satisfied the use of the vehicle under the higher mass limits in the area or on the route to which

- the permit will apply will not pose a significant risk to public safety; and
 - (b) each relevant road manager for the permit has consented to the grant of the permit; and
 - (c) the Regulator is satisfied all other consents required for the grant of the permit have been obtained or given.
- (2) In deciding whether to grant an HML permit for an HML heavy vehicle, the Regulator must have regard to the approved guidelines for granting HML permits.

23 Obtaining consent of road manager

- (1) The road manager consent provisions apply in relation to obtaining the consent of a relevant road manager for the grant of an HML permit.
- (2) For the purposes of subsection (1)—
- (a) a reference in the road manager consent provisions to a mass or dimension authority is taken to be a reference to an HML permit; and
 - (b) a reference in the road manager consent provisions to the grant of a mass or dimension authority is taken to be a reference to the grant of an HML permit; and
 - (c) a reference in the road manager consent provisions to a relevant road manager for a mass or dimension authority is taken to be a reference to a relevant road manager for an HML permit.

24 Conditions of HML permit

- (1) An HML permit—
- (a) must be subject to the road conditions or travel conditions required by a relevant road manager for the permit; and
 - (b) may be subject to any other conditions the Regulator considers appropriate, including, for example—

- (i) conditions about 1 or more matters mentioned in Schedule 2 of the Law; and
 - (ii) without limiting subparagraph (i), intelligent access conditions.
- (2) However, a condition imposed under subsection (1) must be consistent with the higher mass limits.

25 Period for which HML permit applies

- (1) An HML permit applies for the period stated in the permit.
- (2) The period may be less than the period sought by the applicant for the HML permit.

26 HML permit etc.

- (1) If the Regulator grants an HML permit to a person, the Regulator must give the person—
 - (a) an HML permit; and
 - (b) if the Regulator has imposed conditions on the permit under section 24 or has granted the permit for a period less than the period of not more than 3 years sought by the person—an information notice for the decision to impose the conditions or grant the permit for the shorter period.
- (2) The permit must state the following—
 - (a) the name and address of the person to whom the permit is given;
 - (b) a description of—
 - (i) the HML heavy vehicle or vehicles to which the permit applies, including the registration number of the vehicle if it is registered; or
 - (ii) if the permit applies to particular categories of class 2 heavy vehicles—the categories of heavy vehicles to which the permit applies;

[s 27]

- (c) the areas or routes to which the permit applies;
- (d) the road conditions or travel conditions required by a relevant road manager for the permit;
- (e) any other conditions applying to an HML heavy vehicle while it is being used under the permit;
- (f) the period for which the permit applies.

27 Refusal of application for HML permit

If the Regulator refuses an application for an HML permit, the Regulator must give the applicant an information notice for the decision to refuse the application.

28 Contravening conditions of HML permit

The driver or operator of an HML heavy vehicle being used under the higher mass limits under an HML permit must not contravene a condition of the permit.

Maximum penalty—\$4000.

29 Amendment or cancellation on application by HML permit holder

- (1) The holder of an HML permit may apply to the Regulator for an amendment or cancellation of the permit.
- (2) The application must—
 - (a) be in writing; and
 - (b) be accompanied by the prescribed fee for the application; and
 - (c) if the application is for an amendment, state clearly the amendment sought and the reasons for the amendment; and
 - (d) be accompanied by the permit.

- (3) The Regulator may, by notice given to the applicant, require the applicant to give the Regulator any additional information the Regulator reasonably requires to decide the application.
- (4) If the proposed amendment of the permit is—
 - (a) to amend the areas or routes to which the permit applies (other than by omitting an area or route or reducing an area or route in size); or
 - (b) to impose or amend road conditions or travel conditions; then—
 - (c) the Regulator must ask the relevant road managers (for the roads to which the amendment relates) for their consent to the amendment; and
 - (d) the road manager consent provisions apply to the request for consent in the same way as they apply to a request for consent under those provisions, with necessary modifications.
- (5) The Regulator must decide the application as soon as practicable after receiving it.
- (6) If the Regulator decides to grant the application—
 - (a) the Regulator must give the applicant notice of the decision; and
 - (b) the amendment or cancellation takes effect—
 - (i) when notice of the decision is given to the applicant; or
 - (ii) if a later time is stated in the notice, at the later time; and
 - (c) if the Regulator amended the permit, the Regulator must give the applicant a replacement permit for the permit as amended.
- (7) If the Regulator decides not to amend or cancel the permit as sought by the applicant, the Regulator must—
 - (a) give the applicant an information notice for the decision; and

- (b) return the permit to the applicant.

30 Amendment or cancellation of HML permit on Regulator's initiative

- (1) Each of the following is a ground for amending or cancelling an HML permit—
 - (a) the permit was granted because of a document or representation that was—
 - (i) false or misleading; or
 - (ii) obtained or made in an improper way;
 - (b) the holder of the permit has contravened a condition of the permit;
 - (c) the use of HML heavy vehicles under the higher mass limits in an area or on a route the subject of the permit has caused, or is likely to cause, a significant risk to public safety.
- (2) If the Regulator considers a ground exists to amend or cancel an HML permit (the *proposed action*), the Regulator must give the holder of the permit a notice—
 - (a) stating the proposed action; and
 - (b) stating the ground for the proposed action; and
 - (c) outlining the facts and circumstances forming the basis for the ground; and
 - (d) if the proposed action is to amend the permit (including a condition of the permit)—stating the proposed amendment; and
 - (e) inviting the holder to make, within a stated time of at least 14 days after the notice is given to the holder, written representations about why the proposed action should not be taken.
- (3) If, after considering all written representations made under subsection (2)(e), the Regulator still considers a ground exists to take the proposed action, the Regulator may—

- (a) if the proposed action was to amend the HML permit—amend the permit in a way that is not substantially different from the proposed action, including, for example, by—
 - (i) amending the areas or routes to which the permit applies; or
 - (ii) imposing additional conditions on the permit; or
- (b) if the proposed action was to cancel the HML permit—
 - (i) amend the permit, including, for example, as mentioned in paragraph (a)(i) or (ii); or
 - (ii) cancel the permit.
- (4) The Regulator must give the holder an information notice about the decision.
- (5) The amendment or cancellation takes effect—
 - (a) when the information notice is given to the holder; or
 - (b) if a later time is stated in the information notice, at the later time.

31 Amendment or cancellation of HML permit on request by relevant road manager

- (1) This section applies if a relevant road manager for an HML permit is satisfied the use of HML heavy vehicles under the higher mass limits in an area or on a route to which the permit applies (and in or on which is situated a road for which the relevant road manager is a road manager)—
 - (a) has caused, or is likely to cause, damage to road infrastructure; or
 - (b) has had, or is likely to have, an adverse effect on the community arising from noise, emissions or traffic congestion or from other matters stated in approved guidelines; or
 - (c) has posed, or is likely to pose, a significant risk to public safety arising from heavy vehicle use that is

incompatible with road infrastructure or traffic conditions.

- (2) The road manager may ask the Regulator to—
 - (a) amend the HML permit, including, for example, by—
 - (i) amending the areas or routes to which the permit applies; or
 - (ii) imposing or amending road conditions on the permit; or
 - (b) cancel the permit.
- (3) The Regulator must comply with the request.
- (4) However, if consent to the grant of the permit was given by a road authority under section 163 of the Law—
 - (a) the Regulator may refer the request to the road authority; and
 - (b) if the road authority gives the Regulator its written approval of the request, the Regulator must comply with the request; and
 - (c) if the road authority does not give written approval of the road manager's request within 28 days after the referral is made, the Regulator—
 - (i) must not comply with the request; and
 - (ii) must notify the road manager that the road authority has not given its written approval of the request and, as a result, the Regulator must not comply with it.
- (5) If the permit is amended or cancelled under this section, the Regulator must give the holder of the HML permit notice of the amendment or cancellation at least 28 days before the amendment or cancellation is to take effect.
- (6) The notice given to the holder must state—
 - (a) the day the amendment or cancellation is to take effect; and

- (b) the reasons given by the relevant road manager for the amendment or cancellation; and
- (c) the review and appeal information for the road manager's decision.

32 Immediate suspension of HML permit

- (1) This section applies if—
 - (a) the Regulator considers a ground exists to cancel an HML permit; or
 - (b) the Regulator reasonably believes it is necessary to suspend the permit immediately to prevent or minimise serious harm to public safety or significant damage to road infrastructure.
- (2) The Regulator may, by notice (*immediate suspension notice*) given to the holder of the permit, immediately suspend the permit until the earlier of the following—
 - (a) the Regulator gives the person a notice under section 30(4) or 31(5);
 - (b) the Regulator cancels the suspension;
 - (c) the end of 56 days after the day the immediate suspension notice is given to the person.
- (3) This section applies despite sections 29, 30 and 31.

33 Minor amendment of HML permit

- (1) The Regulator may, by notice given to the holder of an HML permit, amend the permit in a minor respect—
 - (a) for a formal or clerical reason; or
 - (b) in another way that does not adversely affect the holder's interests.
- (2) The Regulator must provide the relevant road manager with notice of the amendment.

34 Return of HML permit

- (1) If a person's HML permit is amended or cancelled, the Regulator may, by notice, require the person to return the permit to the Regulator.
- (2) The person must comply with the notice within 7 days after the notice is given to the person or, if a longer period is stated in the notice, within the longer period.
Maximum penalty—\$1500.
- (3) If the HML permit has been amended, the Regulator must give the person a replacement permit as amended.

35 Replacement of defaced etc. HML permit

- (1) If a person's HML permit is defaced, destroyed, lost or stolen, the person must, as soon as reasonably practicable after becoming aware of the matter, apply to the Regulator for a replacement permit.
Maximum penalty—\$1500.
- (2) If the Regulator is satisfied the HML permit has been defaced, destroyed, lost or stolen, the Regulator must give the person a replacement permit as soon as practicable.
- (3) If the Regulator decides not to give a replacement permit to the person, the Regulator must give the person an information notice for the decision.

Part 3 Dimension requirements

37 Prescribed dimension requirements

- (1) The dimension requirements imposed by Schedule 6 are prescribed dimension requirements for the purposes of section 101 of the Law.
- (2) The prescribed dimension requirements apply to a heavy vehicle whether or not the vehicle is loaded.

37A Warning signals required for rear projection of loads

- (1) This section applies if—
 - (a) a load projects more than 1.2m behind a heavy vehicle consisting of only a motor vehicle; or
 - (b) a load projects more than 1.2m behind either the towing vehicle or a trailer in a heavy combination; or
 - (c) a load projects from a pole-type trailer in a heavy combination; or
 - (d) a load projects from a heavy vehicle in a way that it would not be readily visible to a person following immediately behind the vehicle.
- (2) A person must not use the heavy vehicle, or permit the heavy vehicle to be used, on a road unless—
 - (a) during the daytime—a brightly coloured red, red and yellow, or yellow flag at least 300mm by 300mm is fixed to the extreme back of the load; or
 - (b) at night—a light showing a clear red light to the back, visible at a distance of at least 200m, is fixed to the extreme back of the load.

Maximum penalty—\$3000.

37B Displaying warning signs on vehicles if not required by dimension exemption

- (1) A heavy vehicle warning sign must not be displayed on a heavy vehicle unless the heavy vehicle is being used under a dimension exemption.

Maximum penalty—\$3000.

- (2) A pilot vehicle warning sign must not be displayed on a vehicle unless the vehicle is being used as a pilot vehicle for a heavy vehicle being used under a dimension exemption.

Maximum penalty—\$3000.

- (3) In this section—

dimension exemption means an exemption under Part 4.5 of the Law from compliance with a dimension requirement.

heavy vehicle warning sign means a warning sign required to be attached to a heavy vehicle under Schedule 8.

pilot vehicle warning sign means a warning sign required to be attached to a vehicle being used as a pilot vehicle for a heavy vehicle under Schedule 8.

Part 4 Loading requirements

38 Loading requirements

- (1) The loading requirements applying to a heavy vehicle are stated in section 1 of Schedule 7.
- (2) The loading performance standards for heavy vehicles for the purposes of section 115 of the Law are stated in section 2 of Schedule 7.

Part 4A Class 2 heavy vehicle authorisation (permits) and mass or dimension exemption permits

Note—

See also Part 3A of the *Heavy Vehicle (General) National Regulation*, which contains additional provisions relating to class 2 heavy vehicle authorisation (permits), mass or dimension exemption (permits) and other exemption (permits).

38A Application of Pt 4A

- (1) This Part applies to—
 - (a) a class 2 heavy vehicle authorisation (permit); and

(b) a mass or dimension exemption (permit).

(2) In this Part—

permit means a permit specified in subsection (1)(a) or (b).

38B Application for permit

- (1) A person may apply to the Regulator for a permit.
- (2) The application must be—
 - (a) in the approved form; and
 - (b) accompanied by the prescribed fee for the application.
- (3) The Regulator may, by notice given to the applicant, require the applicant to give the Regulator any additional information the Regulator reasonably requires to decide the application.

38C Restriction on grant of class 2 heavy vehicle authorisation (permit)

- (1) The Regulator may grant a class 2 heavy vehicle authorisation (permit) for a class 2 heavy vehicle only if—
 - (a) the Regulator is satisfied the use of the class 2 heavy vehicle on a road under the permit will not pose a significant risk to public safety; and
 - (b) each relevant road manager for the permit has consented to the grant; and
 - (c) the Regulator is satisfied all other consents required for the permit under the law of the relevant jurisdiction have been obtained by the applicant or have been otherwise given.
- (2) In deciding whether to grant a class 2 heavy vehicle authorisation (permit), the Regulator must have regard to the approved guidelines for granting class 2 heavy vehicle authorisations.

38D Restriction on grant of mass or dimension exemption (permit)

- (1) This section applies to a class 1 heavy vehicle or class 3 heavy vehicle that includes 2 or more prime movers or 2 or more hauling units.
- (2) The Regulator may grant a mass or dimension exemption (permit) that exempts the heavy vehicle from compliance with a mass requirement relating to the GCM of the individual prime movers or hauling units if the total GCM of the prime movers or hauling units complies with the mass requirement relating to the GCM of the combined prime movers or hauling units.

38E Conditions of class 2 heavy vehicle authorisation (permits)

- (1) A class 2 heavy vehicle authorisation (permit) must be subject to the road conditions or travel conditions required by a relevant road manager for the permit under section 160 or 161 of the Law.
- (2) A class 2 heavy vehicle authorisation (permit) may be subject to any other conditions the Regulator considers appropriate, including, for example—
 - (a) conditions about 1 or more matters mentioned in Schedule 2 of the Law; and
 - (b) without limiting paragraph (a), intelligent access program conditions.

38F Conditions of mass or dimension exemption (permits)

- (1) A mass or dimension exemption (permit) must—
 - (a) include a condition about the areas or routes to which the permit applies; and
 - (b) be subject to the road conditions or travel conditions required by a relevant road manager for the permit under section 160 or 161 of the Law.

- (2) A mass or dimension exemption (permit) is also subject to conditions applying to the permit under section 39.
- (3) A mass or dimension exemption (permit) may be subject to any other conditions the Regulator considers appropriate, including, for example—
 - (a) conditions about 1 or more matters mentioned in Schedule 2 of the Law; and
 - (b) without limiting paragraph (a), intelligent access program conditions.

38G Granting of permits

- (1) If the Regulator grants a permit to a person, the Regulator must give the person—
 - (a) a permit; and
 - (b) a notice stating the review and appeal information for any of the following decisions that are reviewable decisions—
 - (i) the Regulator’s decision to grant the permit for a period or impose a condition on the permit;
 - (ii) a relevant road manager’s decision to consent to the grant of the permit subject to a condition that a road condition or travel condition be imposed on the permit.
- (2) A permit for a class 2 heavy vehicle authorisation (permit) must state the following—
 - (a) the name of the person to whom the permit is given;
 - (b) if the permit applies to particular categories of class 2 heavy vehicles—the categories of heavy vehicles to which the permit applies;
 - (c) the areas or routes to which the permit applies;
 - (d) the days and hours to which the permit applies;

- (e) the road conditions or travel conditions required by a relevant road manager for the permit under section 160 or 161 of the Law;
 - (f) any other conditions applying to a class 2 heavy vehicle being used on a road under the permit;
 - (g) the period for which the permit applies.
- (3) A permit for a mass or dimension exemption (permit) must state the following—
 - (a) the name of the person to whom the permit is given;
 - (b) a description of each heavy vehicle to which the permit applies, including the registration number of the vehicle if it is registered;
 - (c) the mass requirement or dimension requirement to which the permit applies;
 - (d) the areas or routes to which the permit applies;
 - (e) the road conditions or travel conditions required by a relevant road manager for the permit under section 160 or 161 of the Law;
 - (f) the other conditions of the permit;
 - (g) the period for which the permit applies.

38H Amendment or cancellation on request by relevant road manager

- (1) This section applies if a relevant road manager for a permit is satisfied the use of heavy vehicles on a road under the permit—
 - (a) has caused, or is likely to cause, damage to road infrastructure; or
 - (b) has had, or is likely to have, an adverse effect on the community arising from noise, emissions or traffic congestion or from other matters stated in approved guidelines for granting class 2 heavy vehicle authorisations or mass or dimension exemptions; or

- (c) has posed, or is likely to pose, a significant risk to public safety arising from heavy vehicle use that is incompatible with road infrastructure or traffic conditions.
- (2) The road manager may ask the Regulator to—
 - (a) amend the permit, including, for example, by—
 - (i) amending the areas or routes to which the permit applies; or
 - (ii) amending the days or hours to which the permit applies; or
 - (iii) imposing or amending road conditions or travel conditions; or
 - (b) cancel the permit.
- (3) The Regulator must comply with the request.
- (4) However, if consent to the grant of the permit was given by a road authority under section 163 of the Law—
 - (a) the Regulator may refer the request to the road authority; and
 - (b) if the road authority gives the Regulator its written approval of the request, the Regulator must comply with the request; and
 - (c) if the road authority does not give written approval of the request within 28 days after the referral is made, the Regulator—
 - (i) must not comply with the request; and
 - (ii) must notify the road manager that the road authority has not given its written approval of the request and, as a result, the Regulator must not comply with it.
- (5) If the permit is amended or cancelled under this section, the Regulator must give the holder of the permit notice of the amendment or cancellation at least 28 days before the amendment or cancellation is to take effect.

- (6) The notice given to the holder must state—
- (a) the day the amendment or cancellation is to take effect; and
 - (b) the reasons given by the road manager for the amendment or cancellation; and
 - (c) the review and appeal information for the road manager's decision.

38I Immediate suspension of permit

- (1) This section applies if the Regulator considers it is necessary to suspend a permit immediately to prevent or minimise serious harm to public safety or significant damage to road infrastructure.
- (2) The Regulator may, by notice (an *immediate suspension notice*) given to the person to whom the permit was given, immediately suspend the permit until the earliest of the following—
- (a) the Regulator gives the person a notice under section 38H(5) of this Regulation or an information notice under section 31E(5) of the *Heavy Vehicle (General) National Regulation* and the amendment or cancellation takes effect;
 - (b) the Regulator cancels the suspension;
 - (c) the end of 56 days after the day the immediate suspension notice is given to the person.
- (3) This section applies despite—
- (a) section 38H of this Regulation; and
 - (b) sections 31D and 31E of the *Heavy Vehicle (General) National Regulation*.

38J Keeping copy of permit while driving

- (1) The driver of a heavy vehicle who is driving the vehicle under a permit must keep the permit or a copy of the permit in the driver's possession.

Maximum penalty—\$3000.

- (2) Each relevant party for a driver mentioned in subsection (1) must ensure the driver complies with subsection (1), unless the relevant party has a reasonable excuse.

Maximum penalty—\$3000.

- (3) In this section—

relevant party, for the driver of a heavy vehicle, means—

- (a) an employer of the driver, if the driver is an employed driver; or
- (b) a prime contractor of the driver, if the driver is a self-employed driver; or
- (c) an operator of the vehicle, if the driver is making a journey for the operator.

Part 5 Exemptions for particular overmass or oversize vehicles

Division 1 Conditions

39 Prescribed conditions

- (1) The conditions stated in Part 1 of Schedule 8 are conditions of a mass or dimension exemption applying to a class 1 heavy vehicle granted by Commonwealth Gazette notice.
- (2) The conditions stated in Part 2 of Schedule 8 are conditions of a mass or dimension exemption applying to a class 1 heavy vehicle granted by issuing a permit to a person.

- (3) The conditions stated in Division 1 of Part 3 of Schedule 8 are conditions of a mass or dimension exemption applying to a class 1 heavy vehicle granted by issuing a permit to a person if the exemption is subject to the condition that the heavy vehicle, or a pilot vehicle or escort vehicle accompanying the heavy vehicle, must have warning lights.
- (4) The conditions stated in Division 2 of Part 3 of Schedule 8 are conditions of a mass or dimension exemption applying to a class 1 heavy vehicle granted by issuing a permit to a person if the exemption is subject to the condition that the heavy vehicle, or a pilot vehicle accompanying the heavy vehicle, must have a warning sign.
- (5) A condition mentioned in subsections (1) to (4)—
 - (a) applies unless the notice or permit mentioned in the subsection provides otherwise; and
 - (b) applies to a class 1 heavy vehicle, or a pilot vehicle or escort vehicle accompanying a class 1 heavy vehicle, to which a mass or dimension exemption applies while the class 1 heavy vehicle is being used under the exemption.

Division 2 Declaration of areas, roads and routes and major roads

40 Regulator may make declaration

The Regulator may, by Commonwealth Gazette notice, declare—

- (a) categories of areas, roads and routes for the purpose of imposing conditions under section 119(1) or 125(1) of the Law; or
- (b) a road to be a major road for the purposes of this Regulation.

41 Consent of relevant road manager required

- (1) The Regulator may make a declaration under section 40 only if each relevant road manager for the declaration has consented to the making of the declaration.
- (2) The road manager consent provisions apply in relation to obtaining consent of a road manager for a road for a declaration under section 40.
- (3) For the purposes of subsection (2)—
 - (a) a reference in the road manager consent provisions to a mass or dimension authority is taken to be a reference to a declaration under section 40; and
 - (b) a reference in the road manager consent provisions to the grant of a mass or dimension authority is taken to be a reference to the making of a declaration under section 40; and
 - (c) a reference in the road manager consent provisions to a road manager for a relevant road for a mass or dimension authority is taken to be a reference to a relevant road manager for a declaration under section 40.
- (4) In this section—

relevant road manager means—

 - (a) for a declaration under section 40(a)—a road manager for a road, or a road on the route, or in the area, the subject of the declaration; or
 - (b) for a declaration under section 40(b)—the road manager for the road the subject of the declaration.

42 Matters to which Regulator must have regard

- (1) In deciding whether to make a declaration under section 40, the Regulator must have regard to the following—
 - (a) the type of each affected road, including, for example, whether it is an arterial road;

- (b) the volume of traffic on each affected road;
 - (c) the capacity of each affected road to accommodate wide vehicles;
 - (d) relevant environmental conditions for each affected road, including, for example, visibility of road users;
 - (e) any other matter the Regulator considers appropriate.
- (2) In this section—
- affected road*, for a declaration under section 40, means a road affected by the declaration.

43 Publication of declaration

The Regulator must publish on its website a copy of each declaration made under section 40.

Part 6 Conditions for grant of mass or dimension authority imposed by relevant road manager

44 Imposition of road conditions in relation to a class 2 heavy vehicle

- (1) This section applies for the purposes of section 160(4) of the Law.
- (2) The kinds of road conditions prescribed for section 160(1)(b) of the Law and the circumstances in which it is appropriate to impose those conditions are in Schedule 9.

Part 7 Reviewable decisions

45 Reviewable decisions

- (1) Each decision mentioned in Schedule 10 is a reviewable decision for Chapter 11 of the Law.
- (2) The dissatisfied person for a reviewable decision mentioned in Schedule 10 is each person who is adversely affected by the decision.

Part 8 Transitional provision

46 Saving of stated map and other matters under section 15

- (1) Subsections (2) to (4) apply to the following—
 - (a) a stated map applied under unamended section 15(2) in an HML declaration in existence immediately before the commencement;
 - (b) the areas or routes shown on the stated map immediately before the commencement;
 - (c) a list of areas or routes applied, adopted or incorporated under section 24(1) of Schedule 1 of the Law in an HML declaration in existence immediately before the commencement.
- (2) The stated map is taken to be a stated map applied under amended section 15(2).
- (3) The list of areas or routes is taken to be a stated list applied under amended section 15(2).
- (4) The areas or routes shown on the stated map mentioned in subsection (2) or the stated list mentioned in subsection (3) may only be amended under amended section 15 and section 15A.
- (5) In this section—

amended section 15 means section 15 as amended by the amendment regulation.

amendment regulation means the *Heavy Vehicle National Amendment Regulation 2015*.

commencement means the commencement of the amendment of section 15 under the amendment regulation.

unamended section 15 means section 15 as it existed immediately before it was amended by the amendment regulation.

Schedule 1 General mass limits

section 6(2)

Part 1 Imposition of general mass limits

1 General mass limits

- (1) The mass limits stated in this Schedule apply to a heavy vehicle or a component of a heavy vehicle.
- (2) If, in relation to a particular vehicle or component, this Schedule provides for 2 or more mass limits imposing different mass limits that apply in the same circumstances, the lower or lowest mass limit applies and the other mass limit or mass limits must be disregarded.

2 Mass limits for a single vehicle or combination

- (1) The mass of a single vehicle or combination must not be more than the lowest of the following masses—
 - (a) the mass that is the lower or lowest of the following—
 - (i) for a complying bus without a trailer—
 - (A) if the bus has only 2 axles but is not an eligible 2-axle bus—16t; or
 - (B) if the bus has a rear tandem axle group fitted with single tyres on 1 axle and dual tyres on the other axle but is not an eligible 3-axle bus—20t; or
 - (C) if the bus has a rear tandem axle group fitted with dual tyres on all axles—22.5t;
 - (ii) for a complying bus with a trailer, the sum of—
 - (A) the mass limits for the bus mentioned in subparagraph (i); and

- (B) the mass that is the sum of the mass limits applying to the trailer's axle groups and single axles under Table 1 of Part 2;
 - (iii) for a bus that is an ultra-low floor bus with no axle groups and only 2 single axles but is not an eligible 2-axle bus—16t;
 - (iiia) for an eligible 2-axle bus—18t;
 - (iiib) for an eligible 3-axle bus—22t;
 - (iv) for a complying steer axle vehicle that is neither a B-double nor a road train—44t;
 - (iva) for a Euro VI vehicle (complying steer axle) that is neither a B-double nor a road train—44.5t;
 - (ivb) for a Euro VI vehicle (single steer axle) that is neither a B-double nor a road train—44t;
 - (ivc) for a Euro VI vehicle (twinsteer) that is a prime mover with a twinsteer axle group towing a tri-axle semitrailer—48t;
 - (v) for a prime mover with a twinsteer axle group towing a tri-axle semitrailer—47.5t;
 - (vi) for a vehicle that is not mentioned in subparagraphs (i) to (v) and that is neither a B-double nor a road train—43.5t;
- (b) the mass that is the sum of the mass limits stated in Table 1 of Part 2 in relation to each of the axle groups and single axles of the single vehicle or combination;
 - (c) for a single vehicle or combination that is not a bus—
 - (i) if the reduced mass amount for the vehicle or combination is 55t or less—1t more than the reduced mass amount for the vehicle or combination; or
 - (ii) if the reduced mass amount for the vehicle or combination is more than 55t—2t more than the reduced mass amount for the vehicle or combination.

-
- (1A) For the purposes of subsection (1)(c), the **reduced mass amount**, for a heavy vehicle or combination, is the amount calculated by subtracting the sum of the mass deduction amounts stated in the Table in Part 3 in relation to each axle group of the vehicle or combination from the mass of the vehicle or combination determined under subsection (1)(b).
- (2) A vehicle is not within the amount of the mass stated in subsection (1)(b) if any single axle or axle group fitted to the vehicle has a mass in excess of the mass limits applying to the single axle or axle group.
- (3) The purpose of subsection (2) is to ensure that a vehicle cannot be brought within the mass stated in subsection (1)(b) by off-setting an under limit mass on an axle group or single axle against an over limit mass on another axle group or single axle.
- (4) In a combination, the mass of a dog trailer or pig trailer must not be more than the mass of the towing vehicle.
- (4A) In a combination—
- (a) the mass on the axle group or single axle of a tag trailer must not be an amount that is more than 30% greater than the sum of the mass on all of the axles of the towing vehicle; and
 - (b) the minimum mass on the steer axle or twinsteer axle group of the vehicle that is towing the tag trailer must be the greater of the following—
 - (i) the mass that is 20% of the sum of the mass limits applying to all of the axle groups and single axles of the towing vehicle;
 - (ii) the minimum mass limit for a steer axle or twinsteer axle group for the vehicle when towing, derived from the rating set for the steer axle or twinsteer axle group by the vehicle's manufacturer.
- (5) In this section—
- over limit mass** means the amount by which the mass on an axle group or single axle of a vehicle is more than the mass

stated in relation to the axle group or single axle in Table 1 of Part 2.

single vehicle means a heavy motor vehicle that is not towing another vehicle.

under limit mass means the amount by which the mass on an axle group or single axle of a vehicle is less than the mass stated for the axle group or single axle in Table 1 of Part 2.

3 Mass limits for a vehicle with a particular axle space less than 2.5m

If the distance between any 2 axles on a heavy vehicle that are not part of the same axle group is less than 2.5m, the mass of the heavy vehicle must not be more than 15t.

4 Mass limits for a single axle or axle group


The mass on a single axle or axle group must not be more than the mass limit stated in relation to the single axle or axle group in Table 1 of Part 2.

5 Mass limits relating to axle spacing generally

- (1) The mass of a heavy vehicle, other than a road train or a B-double, relating to an axle spacing of the vehicle must not be more than—
 - (a) for a complying steer axle vehicle, or Euro VI vehicle (single steer axle), for which the steer axle is used to calculate the axle spacing—the table 2 limit increased by 0.5t; or
 - (b) for a Euro VI vehicle (twinsteer) for which the twinsteer axle group is used to calculate the axle spacing—the table 2 limit increased by 0.5t; or
 - (c) for a Euro VI vehicle (complying steer axle) for which the steer axle is used to calculate the axle spacing—the table 2 limit increased by 1.0t; or
 - (d) otherwise—the table 2 limit.

-
- (2) The mass of a B-double relating to an axle spacing of the B-double must not be more than—
- (a) for a complying steer axle vehicle, or Euro VI vehicle (single steer axle), for which the steer axle is used to calculate the axle spacing—the table 3 limit increased by 0.5t; or
 - (b) for a Euro VI vehicle (twinsteer) for which the twinsteer axle group is used to calculate the axle spacing—the table 3 limit increased by 0.5t; or
 - (c) for a Euro VI vehicle (complying steer axle) for which the steer axle is used to calculate the axle spacing—the table 3 limit increased by 1.0t; or
 - (d) otherwise—the table 3 limit.
- (3) The mass of a road train relating to an axle spacing of the road train must not be more than—
- (a) for a Euro VI vehicle (complying steer axle) for which the steer axle is used to calculate the axle spacing—the table 4 limit increased by 0.5t; or
 - (b) for a Euro VI vehicle (twinsteer) for which the twinsteer axle group is used to calculate the axle spacing—the table 4 limit increased by 0.5t; or
 - (c) otherwise—the table 4 limit.
- (4) Each of the following is an axle spacing of a heavy vehicle—
- (a) the distance from the centre-line of a single axle to the centre-line of another single axle;
 - (b) the distance from the centre-line of a single axle to the centre-line of the furthest axle in any axle group;
 - (c) the greatest distance between the centre-lines of axles in any 2 axle groups.

Examples—

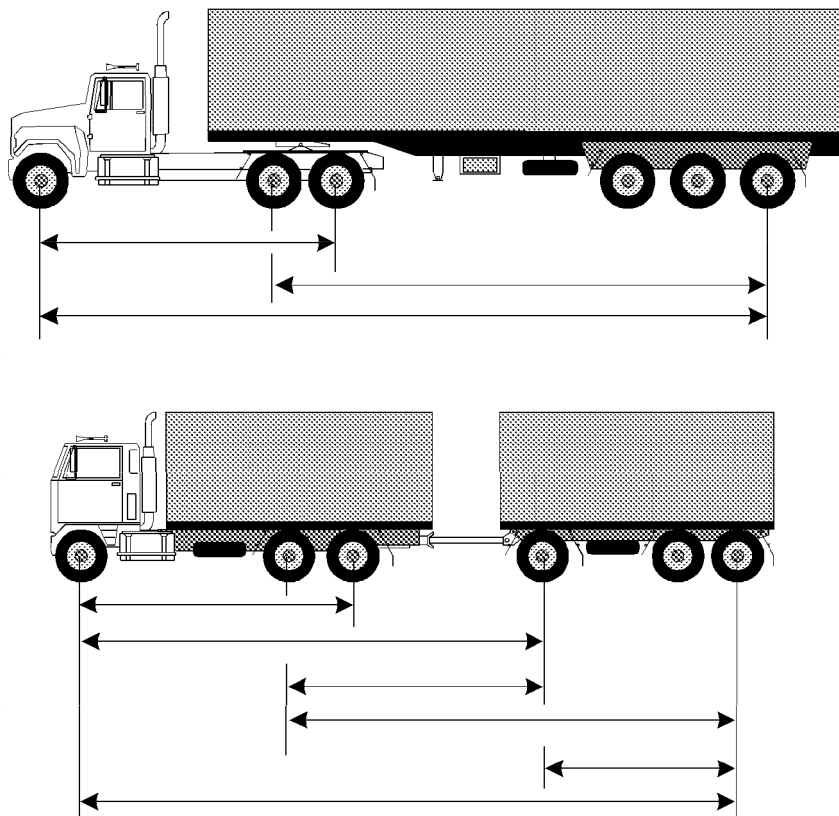

Axle spacings of a heavy vehicle

- (5) The mass limits imposed by subsections (1) to (3) apply to the sum of the mass on each axle group or single axle within the heavy vehicle's axle spacing.
- (5A) However, for a heavy vehicle that is not a bus, the sum of the mass on each axle group or single axle within the vehicle's axle spacing must not be more than—
 - (a) if the reduced mass amount for the vehicle is 55t or less—1t more than the mass limits imposed on the vehicle by subsections (1) to (3); or

- (b) if the reduced mass amount for the vehicle is more than 55t—2t more than the mass limits imposed on the vehicle by subsections (1) to (3).
- (5B) For the purposes of subsection (5A), the **reduced mass amount**, for a heavy vehicle or combination, is the amount calculated by subtracting the sum of the mass deduction amounts stated in the Table in Part 3 in relation to each axle group of the vehicle or combination from the sum of the mass on each axle group or single axle within the vehicle's axle spacing.
- (6) The axle groups or single axles that are within an axle spacing of a heavy vehicle are the end axles and every axle group or single axle between the end axles.

Example—

In the examples under subsection (4), for the longest axle space, the mass limits imposed by subsections (1) to (3) apply to the sum of the mass on each of the axle groups or single axles made up of the 6 axles shown as included within the spacing.

- (7) In this section—

end axles, in relation to an axle spacing, are the axle groups or single axles on each end of the axle spacing.

table 2 limit, in relation to an axle spacing, means the mass limit stated in Table 2 of Part 2 in relation to the axle spacing.

table 3 limit, in relation to an axle spacing, means the mass limit stated in Table 3 of Part 2 in relation to the axle spacing.

table 4 limit, in relation to an axle spacing, means the mass limit stated in Table 4 of Part 2 in relation to the axle spacing.

Part 2 Axle Tables

Table 1—Axle mass limits table

Description of single axle or axle group	Mass limit (t)
Single axles and single axle groups	
Steer axles on—	

Schedule 1

Description of single axle or axle group	Mass limit (t)
(a) a complying bus that is not an eligible 2-axle bus or an eligible 3-axle bus	6.5
(aa) a complying steer axle vehicle	6.5
(b) a hauling unit or prime mover forming part of a road train fitted with tyres with section widths of—	
(i) at least 295mm	6.5
(ii) at least 375mm	7.1
(ba) an eligible 2-axle bus	7.0
(bb) an eligible 3-axle bus	6.5
(bc) Euro VI vehicle (complying steer axle) fitted with tyres with section widths of—	
(i) at least 295mm but less than 315mm	6.5
(ii) at least 315mm	7.0
(bd) Euro VI vehicle (single steer axle)	6.5
(c) another motor vehicle	6.0
Single axle or single axle group fitted with single tyres with section widths of—	
(a) less than 375mm	6.0
(b) at least 375mm but less than 450mm	6.7
(c) at least 450mm	7.0
Single axle or single axle group fitted with dual tyres on—	
(a) a pig trailer	8.5
(b) a complying bus, or a bus authorised to carry standing passengers under an Australian road law, that is not an eligible 2-axle bus	10.0
(c) an ultra-low floor bus with no axle groups and only 2 single axles that is not an eligible 2-axle bus	11.0

Description of single axle or axle group	Mass limit (t)
(ca) an eligible 2-axle bus	12.0
(d) another vehicle	9.0
Tandem axle group	
Tandem axle group fitted with single tyres with section widths of—	
(a) less than 375mm	11.5
(b) at least 375mm but less than 450mm	13.8
(c) at least 450mm	14.5
Tandem axle group fitted with single tyres on 1 axle and dual tyres on the other axle on—	
(a) a complying bus that is not an eligible 3-axle bus	14.0
(ab) an eligible 3-axle bus with tyres on the axle fitted with single tyres that have a section width of at least 295mm	15.5
(b) another motor vehicle	13.5
Tandem axle group fitted with dual tyres on—	
(a) a pig trailer	15.0
(b) another vehicle	17.0
Twinsteer axle groups	
Twinsteer axle group without a load-sharing suspension system	10.0
Twinsteer axle group with a load-sharing suspension system	11.0
Euro VI vehicle (twinsteer) fitted with tyres with section widths of at least 275mm	11.5
Tri-axle groups	

Description of single axle or axle group	Mass limit (t)
Tri-axle group on a vehicle fitted with— (a) single tyres with section widths of less than 375mm on all axles; or (b) single tyres with section widths of less than 375mm on some axles and dual tyres on the other axles	15.5
Tri-axle group on a pig trailer fitted with— (a) single tyres with section widths of at least 375mm on all axles; or (b) dual tyres on all axles; or (c) single tyres with section widths of at least 375mm on some axles and dual tyres on the other axles	18.0
Tri-axle group on a vehicle other than a pig trailer fitted with— (a) single tyres with section widths of at least 375mm on all axles; or (b) dual tyres on all axles; or (c) single tyres with section widths of at least 375mm on some axles and dual tyres on the other axles	21.0
Quad-axle groups	
Quad-axle group fitted with single tyres with section widths of less than 375mm	15.5
Quad-axle group fitted with single tyres with section widths of at least 375mm or dual tyres	21.0
Axle groups of 5 or more	
Rear group of 5 or more axles on a low loader fitted with single tyres with section widths of less than 375mm	15.5
Any other rear group of 5 or more axles on a low loader	21.0

Table 2—Axle spacing mass limits general table

Length of axle spacing (m)		Mass limit (t)
at least	less than	
0.0	2.5	15.0
2.5	3.7	23.0
3.7	3.8	23.5
3.8	4.0	24.0
4.0	4.2	24.5
4.2	4.3	25.0
4.3	4.5	25.5
4.5	4.7	26.0
4.7	4.8	26.5
4.8	5.0	27.0
5.0	5.2	27.5
5.2	5.3	28.0
5.3	5.5	28.5
5.5	5.7	29.0
5.7	5.8	29.5
5.8	6.0	30.0
6.0	6.2	30.5
6.2	6.3	31.0
6.3	6.5	31.5
6.5	6.7	32.0
6.7	6.8	32.5
6.8	7.0	33.0

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
7.0	7.2	33.5
7.2	7.3	34.0
7.3	7.5	34.5
7.5	7.7	35.0
7.7	7.8	35.5
7.8	8.0	36.0
8.0	8.2	36.5
8.2	8.3	37.0
8.3	8.5	37.5
8.5	8.7	38.0
8.7	8.8	38.5
8.8	9.0	39.0
9.0	9.2	39.5
9.2	9.3	40.0
9.3	9.5	40.5
9.5	9.7	41.0
9.7	9.8	41.5
9.8	10.0	42.0
10.0	10.5	42.5
10.5	11.0	43.0
11.0	11.5	43.5
11.5	12.0	44.0
12.0	12.5	44.5

Length of axle spacing (m)		Mass limit (t)
at least	less than	
12.5	13.0	45.0
13.0	13.5	45.5
13.5	14.0	46.0
14.0	—	46.5

Table 3—Axle spacing mass limits B-double table

Length of axle spacing (m)		Mass limit (t)
at least	less than	
0.0	2.5	15.0
2.5	3.7	23.0
3.7	3.8	23.5
3.8	4.0	24.0
4.0	4.2	24.5
4.2	4.3	25.0
4.3	4.5	25.5
4.5	4.7	26.0
4.7	4.8	26.5
4.8	5.0	27.0
5.0	5.2	27.5
5.2	5.3	28.0
5.3	5.5	28.5
5.5	5.7	29.0
5.7	5.8	29.5
5.8	6.0	30.0

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
6.0	6.2	30.5
6.2	6.3	31.0
6.3	6.5	31.5
6.5	6.7	32.0
6.7	6.8	32.5
6.8	7.0	33.0
7.0	7.2	33.5
7.2	7.3	34.0
7.3	7.5	34.5
7.5	7.7	35.0
7.7	7.8	35.5
7.8	8.0	36.0
8.0	8.2	36.5
8.2	8.3	37.0
8.3	8.5	37.5
8.5	8.7	38.0
8.7	8.8	38.5
8.8	9.0	39.0
9.0	9.2	39.5
9.2	9.3	40.0
9.3	9.5	40.5
9.5	9.7	41.0
9.7	9.8	41.5

Length of axle spacing (m)		Mass limit (t)
at least	less than	
9.8	10.0	42.0
10.0	10.2	42.5
10.2	10.3	43.0
10.3	10.5	43.5
10.5	10.7	44.0
10.7	10.8	44.5
10.8	11.0	45.0
11.0	11.2	45.5
11.2	11.3	46.0
11.3	11.7	46.5
11.7	12.0	47.0
12.0	12.3	47.5
12.3	12.7	48.0
12.7	13.0	48.5
13.0	13.3	49.0
13.3	13.7	49.5
13.7	14.0	50.0
14.0	14.3	50.5
14.3	14.7	51.0
14.7	15.0	51.5
15.0	15.3	52.0
15.3	15.7	52.5
15.7	16.0	53.0

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
16.0	16.3	53.5
16.3	16.7	54.0
16.7	17.0	54.5
17.0	17.3	55.0
17.3	17.7	55.5
17.7	18.0	56.0
18.0	18.3	56.5
18.3	18.7	57.0
18.7	19.0	57.5
19.0	19.3	58.0
19.3	19.7	58.5
19.7	20.0	59.0
20.0	20.3	59.5
20.3	20.7	60.0
20.7	21.0	60.5
21.0	—	62.5

Table 4—Axle spacing mass limits road train table

Length of axle spacing (m)		Mass limit (t)
at least	less than	
0.0	2.5	15.0
2.5	3.7	23.0
3.7	3.8	23.5
3.8	4.0	24.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
4.0	4.2	24.5
4.2	4.3	25.0
4.3	4.5	25.5
4.5	4.7	26.0
4.7	4.8	26.5
4.8	5.0	27.0
5.0	5.2	27.5
5.2	5.3	28.0
5.3	5.5	28.5
5.5	5.7	29.0
5.7	5.8	29.5
5.8	6.0	30.0
6.0	6.2	30.5
6.2	6.3	31.0
6.3	6.5	31.5
6.5	6.7	32.0
6.7	6.8	32.5
6.8	7.0	33.0
7.0	7.2	33.5
7.2	7.3	34.0
7.3	7.5	34.5
7.5	7.7	35.0
7.7	7.8	35.5

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
7.8	8.0	36.0
8.0	8.2	36.5
8.2	8.3	37.0
8.3	8.5	37.5
8.5	8.7	38.0
8.7	8.8	38.5
8.8	9.0	39.0
9.0	9.2	39.5
9.2	9.3	40.0
9.3	9.5	40.5
9.5	9.7	41.0
9.7	9.8	41.5
9.8	10.0	42.0
10.0	10.2	42.5
10.2	10.3	43.0
10.3	10.5	43.5
10.5	10.7	44.0
10.7	10.8	44.5
10.8	11.0	45.0
11.0	11.2	45.5
11.2	11.3	46.0
11.3	11.5	46.5
11.5	11.7	47.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
11.7	11.8	47.5
11.8	12.0	48.0
12.0	12.2	48.5
12.2	12.3	49.0
12.3	12.5	49.5
12.5	12.7	50.0
12.7	12.8	50.5
12.8	13.0	51.0
13.0	13.2	51.5
13.2	13.3	52.0
13.3	13.5	52.5
13.5	13.7	53.0
13.7	13.8	53.5
13.8	14.0	54.0
14.0	14.2	54.5
14.2	14.3	55.0
14.3	14.5	55.5
14.5	14.7	56.0
14.7	14.8	56.5
14.8	15.0	57.0
15.0	15.2	57.5
15.2	15.3	58.0
15.3	15.5	58.5

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
15.5	15.7	59.0
15.7	15.8	59.5
15.8	16.0	60.0
16.0	16.2	60.5
16.2	16.3	61.0
16.3	16.5	61.5
16.5	16.7	62.0
16.7	16.8	62.5
16.8	17.0	63.0
17.0	17.2	63.5
17.2	17.3	64.0
17.3	17.5	64.5
17.5	17.7	65.0
17.7	17.8	65.5
17.8	18.0	66.0
18.0	18.2	66.5
18.2	18.3	67.0
18.3	18.5	67.5
18.5	18.7	68.0
18.7	18.8	68.5
18.8	19.0	69.0
19.0	19.2	69.5
19.2	19.3	70.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
19.3	19.5	70.5
19.5	19.7	71.0
19.7	19.8	71.5
19.8	20.0	72.0
20.0	20.2	72.5
20.2	20.3	73.0
20.3	20.5	73.5
20.5	20.7	74.0
20.7	20.8	74.5
20.8	21.0	75.0
21.0	21.2	75.5
21.2	21.3	76.0
21.3	21.5	76.5
21.5	21.7	77.0
21.7	21.8	77.5
21.8	22.0	78.0
22.0	22.2	78.5
22.2	22.3	79.0
22.3	22.5	79.5
22.5	22.7	80.0
22.7	22.8	80.5
22.8	23.0	81.0
23.0	23.2	81.5

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
23.2	23.3	82.0
23.3	23.5	82.5
23.5	23.7	83.0
23.7	23.8	83.5
23.8	24.0	84.0
24.0	24.2	84.5
24.2	24.3	85.0
24.3	24.5	85.5
24.5	24.7	86.0
24.7	24.8	86.5
24.8	25.0	87.0
25.0	25.2	87.5
25.2	25.3	88.0
25.3	25.5	88.5
25.5	25.7	89.0
25.7	25.8	89.5
25.8	26.0	90.0
26.0	26.2	90.5
26.2	26.3	91.0
26.3	26.5	91.5
26.5	26.7	92.0
26.7	26.8	92.5
26.8	27.0	93.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
27.0	27.2	93.5
27.2	27.3	94.0
27.3	27.5	94.5
27.5	27.7	95.0
27.7	27.8	95.5
27.8	28.0	96.0
28.0	28.2	96.5
28.2	28.3	97.0
28.3	28.5	97.5
28.5	28.7	98.0
28.7	28.8	98.5
28.8	29.0	99.0
29.0	29.2	99.5
29.2	29.3	100.0
29.3	29.5	100.5
29.5	29.7	101.0
29.7	29.8	101.5
29.8	30.0	102.0
30.0	30.2	102.5
30.2	30.3	103.0
30.3	30.5	103.5
30.5	30.7	104.0
30.7	30.8	104.5

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
30.8	31.0	105.0
31.0	31.2	105.5
31.2	31.3	106.0
31.3	31.5	106.5
31.5	31.7	107.0
31.7	31.8	107.5
31.8	32.0	108.0
32.0	32.2	108.5
32.2	32.3	109.0
32.3	32.5	109.5
32.5	32.7	110.0
32.7	32.8	110.5
32.8	33.0	111.0
33.0	33.2	111.5
33.2	33.3	112.0
33.3	33.5	112.5
33.5	33.7	113.0
33.7	33.8	113.5
33.8	34.0	114.0
34.0	34.2	114.5
34.2	34.3	115.0
34.3	34.5	115.5
34.5	34.7	116.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
34.7	34.8	116.5
34.8	35.0	117.0
35.0	35.2	117.5
35.2	35.3	118.0
35.3	35.5	118.5
35.5	35.7	119.0
35.7	35.8	119.5
35.8	36.0	120.0
36.0	36.2	120.5
36.2	36.3	121.0
36.3	36.5	121.5
36.5	36.7	122.0
36.7	36.8	122.5
36.8	37.0	123.0
37.0	37.2	123.5
37.2	37.3	124.0
37.3	37.5	124.5
37.5	37.7	125.0
37.7	37.8	125.5
37.8	38.0	126.0
38.0	38.2	126.5
38.2	38.3	127.0
38.3	38.5	127.5

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
38.5	38.7	128.0
38.7	38.8	128.5
38.8	39.0	129.0
39.0	39.2	129.5
39.2	39.3	130.0
39.3	39.5	130.5
39.5	39.7	131.0
39.7	39.8	131.5
39.8	40.0	132.0
40.0	40.2	132.5
40.2	40.3	133.0
40.3	40.5	133.5
40.5	40.7	134.0
40.7	40.8	134.5
40.8	41.0	135.0
41.0	41.2	135.5
41.2	41.3	136.0
41.3	41.5	136.5
41.5	41.7	137.0
41.7	41.8	137.5
41.8	42.0	138.0
42.0	42.2	138.5
42.2	42.3	139.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
42.3	42.5	139.5
42.5	42.7	140.0
42.7	42.8	140.5
42.8	43.0	141.0
43.0	43.2	141.5
43.2	43.3	142.0
43.3	43.5	142.5
43.5	43.7	143.0
43.7	43.8	143.5
43.8	44.0	144.0
44.0	44.2	144.5
44.2	44.3	145.0
44.3	44.5	145.5
44.5	44.7	146.0
44.7	44.8	146.5
44.8	45.0	147.0
45.0	45.2	147.5
45.2	45.3	148.0
45.3	45.5	148.5
45.5	45.7	149.0
45.7	45.8	149.5
45.8	46.0	150.0
46.0	46.2	150.5

Schedule 1

Length of axle spacing (m)		Mass limit (t)
at least	less than	
46.2	46.3	151.0
46.3	46.5	151.5
46.5	46.7	152.0
46.7	46.8	152.5
46.8	47.0	153.0
47.0	47.2	153.5
47.2	47.3	154.0
47.3	47.5	154.5
47.5	47.7	155.0
47.7	47.8	155.5
47.8	48.0	156.0
48.0	48.2	156.5
48.2	48.3	157.0
48.3	48.5	157.5
48.5	48.7	158.0
48.7	48.8	158.5
48.8	49.0	159.0
49.0	49.2	159.5
49.2	49.3	160.0
49.3	49.5	160.5
49.5	49.7	161.0
49.7	49.8	161.5
49.8	50.0	162.0

Length of axle spacing (m)		Mass limit (t)
at least	less than	
50.0	50.2	162.5
50.2	50.3	163.0
50.3	50.5	163.5
50.5	50.7	164.0
50.7	50.8	164.5
50.8	51.0	165.0
51.0	51.2	165.5
51.2	51.3	166.0
51.3	51.5	166.5
51.5	51.7	167.0
51.7	51.8	167.5
51.8	52.0	168.0
52.0	52.2	168.5
52.2	52.3	169.0
52.3	52.5	169.5
52.5	52.7	170.0
52.7	52.8	170.5
52.8	53.0	171.0
53.0	53.2	171.5
53.2	53.3	172.0
53.3	—	172.5

Part 3 Axle Mass Deduction Table

Table—Axle mass deduction

Description of axle group	Mass deduction (t)
Tandem axle group	
Tandem axle group fitted with single tyres with section widths of—	
(a) less than 375mm	0.5
(b) at least 375mm but less than 450mm	0.5
(c) at least 450mm	0.5
Tandem axle group fitted with single tyres on 1 axle and dual tyres on the other axle on a motor vehicle other than a bus	0.5
Tandem axle group fitted with dual tyres on a vehicle other than a pig trailer	0.5
Tri-axle groups	
Tri-axle group on a vehicle fitted with—	
(a) single tyres with section widths of less than 375mm on all axles; or	0.5
(b) single tyres with section widths of less than 375mm on some axles and dual tyres on the other axles	
Tri-axle group on a vehicle other than a pig trailer fitted with—	
(a) single tyres with section widths of at least 375mm on all axles; or	1.0
(b) dual tyres on all axles; or	
(c) single tyres with section widths of at least 375mm on some axles and dual tyres on the other axles	
Quad-axle groups	

Description of axle group	Mass deduction (t)
Quad-axle group fitted with single tyres with section widths of less than 375mm	0.5
Quad-axle group fitted with single tyres with section widths of at least 375mm or dual tyres	1.0
Axle groups of 5 or more	
Rear group of 5 or more axles on a low loader fitted with single tyres with section widths of less than 375mm	0.5
Any other rear group of 5 or more axles on a low loader	1.0

Schedule 4 Quad axle group mass exception limits

section 6(3)

1 Quad axle group mass exception limits

- (1) The quad axle group mass exception limits apply to a heavy vehicle fitted with a quad axle group if—
 - (a) all axles in the quad axle group are fitted with dual tyres; and
 - (b) a PBS vehicle approval is in force for the vehicle that permits a mass of up to 27t on the quad axle group; and
 - (c) the vehicle complies with PBS Standards and with the conditions of the PBS vehicle approval.
- (2) The quad axle group mass exception limits apply as an exception to the general mass limits for the quad axle group as stated in subsection (3).
- (3) The mass on the quad axle group must not be more than 27t.

Note—

For the mass limit that would otherwise apply, see Schedule 1.

(4) In this section—

PBS Standards means the Standards and Vehicle Assessment Rules as defined under section 3 of the *Heavy Vehicle (General) National Regulation*.

PBS vehicle approval means a PBS vehicle approval under the *Heavy Vehicle (General) National Regulation*.

Schedule 5 Higher mass limits

section 6(3)

1 Application of higher mass limits to single axle or axle group

- (1) The higher mass limits apply to a single axle or axle group on a heavy vehicle as follows—
 - (a) a single-drive axle on a bus;
 - (b) a tandem axle group other than a 6-tyred tandem axle group;
 - (c) a 6-tyred tandem axle group;
 - (d) a tri-axle group.
- (2) The higher mass limits apply if the single-drive axle on the bus mentioned in subsection (1)(a) or if an axle group mentioned in subsection (1)(b), (c) or (d)—
 - (a) complies with subsections (3) and (4); and
 - (b) is fitted to a heavy vehicle that complies with subsections (5) and (6).
- (3) The mass permitted for the single axle or axle group under the general mass limits must be at least—
 - (a) for a single-drive axle on a bus—9t; or
 - (b) for a tandem axle group other than a 6-tyred tandem axle group—17t; or
 - (c) for a 6-tyred tandem axle group—13.5t; or
 - (d) for a tri-axle group—21t.
- (4) The single axle or axle group must be fitted with a certified road-friendly suspension system.

Example—

The Vehicle Standards Bulletin Number 11 mentioned in the definition *certified road-friendly suspension system* in section 3 requires axle groups to have dual tyres.

- (5) The heavy vehicle must be a heavy vehicle that—
- (a) is not a class 1 heavy vehicle; and
 - (b) is not a rigid truck towing a dog trailer or a vehicle fitted with a drive axle group with more than 2 axles (unless it is a B-double or road train); and
 - (ba) is not a truck and tag trailer combination; and
 - (c) if the heavy vehicle is fitted with a tri-axle group and is used on a road outside the Northern Territory—is being operated by a person who holds mass alternative compliance accreditation for the vehicle.
- (6) The higher mass limits apply to the single axle or axle group fitted to a heavy vehicle on all roads—
- (a) within an HML area for the heavy vehicle; or
 - (b) on an HML route for the heavy vehicle.

Example of how the application of higher mass limits can be decided—

In deciding whether the higher mass limits may be applied to a tri-axle group, the following questions will need to be answered in the positive—

- is the tri-axle group fitted to a vehicle that complies with subsections (5) and (6)?
- if so, does the tri-axle group qualify for at least 20t under the general mass limits?
- if so, is the axle group fitted with a certified road-friendly suspension system?

2 Higher mass limits

- (1) The higher mass limits apply as an exception to the general mass limits as stated in subsections (2) to (5).
- (2) The mass on the single axle or axle group must not be more than the following (the ***mass exception amount***)—
- (a) for a single-drive axle on a bus—10t;
 - (b) for a tandem axle group other than a 6-tyred tandem axle group—17t;
 - (c) for a 6-tyred tandem axle group—14t;

- (d) for a tri-axle group—22.5t.
- (3) The mass of the vehicle must not be more than the lower of the following masses—
 - (a) either—
 - (i) for a vehicle mentioned in section 2(1)(a)(iv) to (vi) of Schedule 1—the mass stated for the vehicle in section 2(1)(a) of Schedule 1 decreased by 1t; or
 - (ii) for another vehicle mentioned in section 2(1)(a) of Schedule 1—the mass stated for the vehicle in section 2(1)(a) of Schedule 1;
 - (b) the mass determined by applying section 2(1)(b) of Schedule 1 with the amount stated for the single axle or axle group in Table 1 of Part 2 of Schedule 1 changed to the mass exception amount.
- (4) Subsection (5) applies if, because of the application of subsection (1) to a single axle or axle group within a particular axle spacing, the mass permitted for the vehicle is increased under subsection (3) by an amount above the general mass limits for the vehicle.
- (5) Subject to subsection (5A), the mass relating to the axle spacing must not be more than the mass determined by applying section 5 of Schedule 1 increased by the sum of the following mass amounts for each axle or axle group within the vehicle's axle spacing—
 - (a) for a single-drive axle on a bus—1t;
 - (b) for a tandem axle group other than a 6-tyred tandem axle group—0.5t;
 - (c) for a 6-tyred tandem axle group—1t;
 - (d) for a tri-axle group—2.5t.
- (5A) For the purposes of determining the mass relating to the axle spacing in subsection (5), section 5(5A) of Schedule 1 does not apply.
- (6) This section has effect subject to section 3.

3 Higher mass limits increased for particular vehicles

- (1) This section applies if—
 - (a) the heavy vehicle is a vehicle to which the Euro VI vehicle mass transfer allowance applies; and
 - (b) the mass on the drive axle of the vehicle is increased under section 1 of Schedule 5B.
- (2) The higher mass limits applying to the vehicle's drive axle under section 2 are increased by an amount, of up to 0.5t, that corresponds to the increase in the mass on the vehicle's drive axle under section 1 of Schedule 5B.

Schedule 5B Euro VI vehicle mass transfer allowance

section 6(3)

1 Euro VI vehicle mass transfer allowance

- (1) The Euro VI vehicle mass transfer allowance applies to a heavy motor vehicle if the vehicle is one of the following (each an *eligible vehicle*)—
 - (a) a Euro VI vehicle (complying steer axle);
 - (b) a Euro VI vehicle (single steer axle);
 - (c) a Euro VI vehicle (twinsteer).
- (2) The Euro VI vehicle mass transfer allowance applies as an exception to the general mass limits for an eligible vehicle as stated in subsections (4) to (5).
- (3) The Euro VI vehicle mass transfer allowance applies to an eligible vehicle in addition to any higher mass limits that apply to the vehicle.

Note—

See also section 3 of Schedule 5.

- (4) The mass on the drive axle of an eligible vehicle may be increased by up to 0.5t if there is a corresponding decrease in the mass on—
 - (a) for a Euro VI vehicle (complying steer axle) or Euro VI vehicle (single steer axle)—the vehicle's steer axle; or
 - (b) for a Euro VI vehicle (twinsteer)—the vehicle's twinsteer axle group.
- (4A) Also, subject to subsection (4B), the mass on the drive axle of an eligible vehicle may be increased by up to 0.5t if there is a corresponding decrease in the mass on the vehicle's steer axle or twinsteer axle group consisting of the total of—
 - (a) the amount that is the difference in mass between the manufacturer's mass limit on the vehicle's steer axle or

- twinsteer axle group and the general mass limit for the steer axle or twinsteer axle group in Table 1 of Part 2 of Schedule 1; and
- (b) any additional amount by which the mass on the vehicle's steer axle or twinsteer axle group is decreased.
- (4B) The Euro VI vehicle mass transfer allowance applies to an eligible vehicle under subsection (4A) only if—
- (a) the vehicle—
- (i) for a Euro VI vehicle (complying steer axle)—is fitted with tyres with section widths of at least 315mm; or
- (ii) for a Euro VI vehicle (twinsteer)—complies with tyre section width requirements stated for the vehicle in Table 1 of Part 2 of Schedule 1; or
- (iii) is a Euro VI vehicle (single steer axle); and
- (b) the manufacturer's mass limit on the vehicle's steer axle or twinsteer axle group is less than the general mass limit stated for the steer axle or twinsteer axle group in Table 1 of Part 2 of Schedule 1; and
- (c) an increase of mass on the vehicle's drive axle does not result in a breach of the general mass limit mentioned in paragraph (b).
- (4C) Despite subsection (4), a Euro VI vehicle (complying steer axle) does not need an adjustment in the mass on the vehicle's steer axle and the Euro VI vehicle mass transfer allowance is taken to apply to the vehicle if—
- (a) the vehicle's steer axle is fitted with tyres with section widths of at least 295mm but less than 315mm; and
- (b) an increase of mass on the vehicle's drive axle does not result in a breach of the general mass limit stated for the vehicle's steer axle in Table 1 of Part 2 of Schedule 1.
- (5) However, the Euro VI vehicle mass transfer allowance does not apply to an eligible vehicle if the transfer of mass between the vehicle's steer axle, or twinsteer axle group, and drive axle under subsections (4) to (4C) results in—

- (a) the sum of the steer axle, or twinsteer axle group, and drive axle being more than—
 - (ii) if the higher mass limits apply to the vehicle's axles—the sum of the higher mass limits for the axles; or
 - (iii) otherwise—the sum of the general mass limits for the axles; or
- (b) an increase in the mass on the drive axle that is more than 0.5t; or
- (c) other than for an eligible vehicle to which subsection (4C) applies—a decrease in the mass on the steer axle, or twinsteer axle group, that does not correspond to the increase in mass on the drive axle; or
- (ca) for a vehicle that is fitted with a drive axle that is a tri-axle group—the mass on the drive axle being more than 21t; or
- (d) the mass of the vehicle being more than—
 - (ii) if the higher mass limits apply to the vehicle—the mass limit that applies to the vehicle under section 2 of Schedule 5; or
 - (iii) otherwise—the general mass limits that apply to the vehicle under section 2 of Schedule 1.
- (6) This section has effect subject to section 2.

2 Axle spacing

- (1) This section applies if—
 - (a) the mass of the drive axle within a particular axle spacing on the eligible vehicle is permitted by the Euro VI vehicle mass transfer allowance to be increased by up to 0.5t; and
 - (b) the increase would otherwise result in a breach of the mass limits for the axle groups and any single axles within the axle spacing.

- (2) Subject to subsection (3), the mass for any single axles and axle groups within the axle spacing is permitted to be increased but must not be more than the mass otherwise permitted for the axle spacing increased by the same amount.
- (3) However, the increased mass must be offset by adjusting the masses on the steer axle or twinsteer axle group, whether within the same axle spacing or different axle spacings.

Note—

Requirements about the mass of a heavy vehicle relating to an axle spacing of a heavy vehicle are referred to in section 5 of Schedule 1.

Schedule 6 Dimension requirements


section 37

Part 1 Preliminary


1 Meaning of *rear overhang* and *rear overhang line*

- (1) This section defines *rear overhang* and *rear overhang line* for this Regulation.
- (2) The *rear overhang* of a vehicle is the distance between the rear of the vehicle and the rear overhang line of the vehicle.
- (3) For a vehicle with an axle group at the rear comprising only 1 axle, the *rear overhang line* is a line running along the centre-line of the axle.
- (4) For a vehicle with an axle group at the rear comprising 2 axles, 1 of which is fitted with twice the number of tyres as the other, the *rear overhang line* is a line running parallel to the axles that is—
 - (a) closer to the axle carrying the greater number of tyres than it is to the other axle; and
 - (b) located at one-third of the distance between the 2 axles.
- (5) For a vehicle with an axle group at the rear that is not an axle group mentioned in subsection (3) or (4), the *rear overhang line* is a line running parallel to the axles down the centre of the axle group.
- (6) For the purposes of applying subsection (3), (4) or (5) to a vehicle, if an axle group includes at least 1 steerable axle, that axle is to be disregarded unless—
 - (a) the group comprises only 1 axle and that axle is a steerable axle; or
 - (b) all the axles in the group are steerable axles.


Examples of rear overhang line—

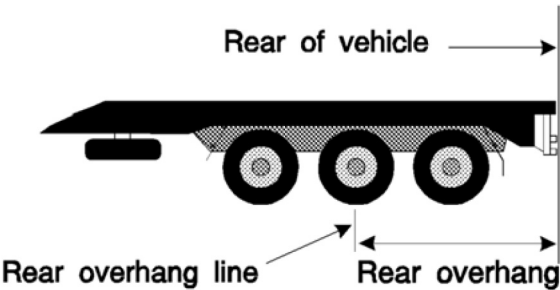

Rear overhang and rear overhang line — vehicle with tri axle group at rear

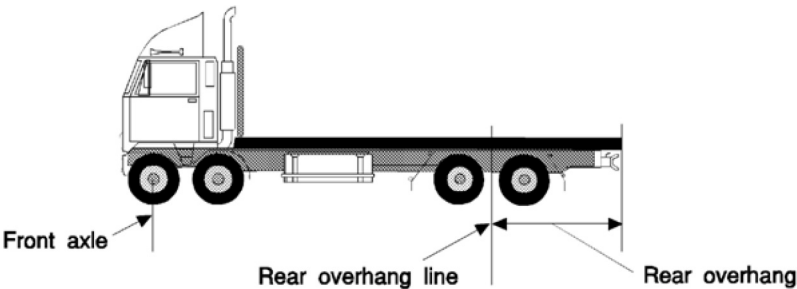

Rear overhang and rear overhang line — motor vehicle

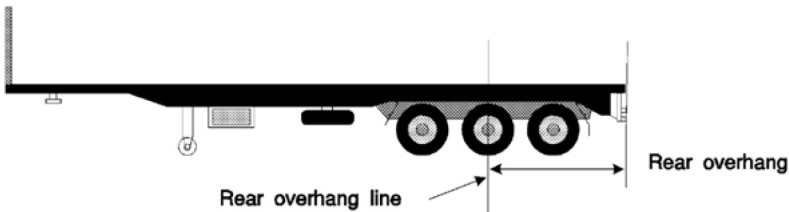

Rear overhang and rear overhang line — semi-trailer

2 The load is part of a vehicle's dimensions

In this Schedule, a reference to a vehicle is taken to include a reference to the vehicle together with its load, unless otherwise stated.

Part 2 Heavy vehicles

3 Length—combination or single vehicle

- (1) A heavy vehicle consisting of a combination or single vehicle must not be longer than—
 - (a) for a combination other than a B-double, road train or a combination with 2 decks for carrying vehicles—
 - (i) if the combination includes a heavy trailer that is not fitted with a braking system that complies with subsection (3B)—19m; or
 - (ii) otherwise—20m; or
 - (b) for a B-double—25m; or
 - (c) for a road train—53.5m; or
 - (d) for a combination, other than a road train, designed to carry vehicles on 2 or more partly or completely overlapping decks—25m; or
 - (e) for an articulated bus—18m; or
 - (f) for a bus other than an articulated bus—14.5m; or
 - (g) for another single vehicle—12.5m.
- (3) However, a B-double may be up to 26m long if—
 - (a) the distance from the front articulation point of the most forward semitrailer to the rear of the B-double is not more than 20.6m; and
 - (b) the prime mover in the B-double—
 - (i) is fitted with a front underrun protective device complying with UN ECE Regulation No. 93 or ADR 84; and

Schedule 6

- (ii) for a prime mover manufactured after 31 December 2005—is fitted with a cab complying with UN ECE Regulation No. 29; and
 - (iii) other than for a deck permitted under subsection (3A), does not have an area carrying, or built to carry, goods.
- (3A) A prime mover in a B-double carrying, or designed to carry, vehicles may have a deck fitted over the top of the prime mover that is carrying, or built to carry, a vehicle.
- (3B) A heavy trailer, being used in a combination that is longer than 19m but not more than 20m, must be fitted with a braking system that—
 - (a) complies with the requirements of ADR 38/05 or a later version of ADR 38; and
 - (b) is powered by the towing vehicle.
- (4) In this section—

heavy trailer means a heavy trailer within the meaning of ADR (Definitions and Vehicle Categories).


single vehicle means a heavy motor vehicle that is not towing another vehicle.

4 Length—trailers

- (1) This section applies to a trailer that is, or forms part of, a heavy vehicle.
- (2) On a semitrailer, dog trailer or tag trailer—
 - (a) the distance from the front articulation point to the rear overhang line must not be more than—
 - (i) for a prescribed semitrailer—the maximum distance stated in the Table in Part 4 of Schedule 6 that applies in relation to the wheelbase of the prime mover; or
 - (ii) otherwise—9.5m; and

- (b) the distance from the front articulation point to the rear of the trailer must not be more than—
 - (i) for a prescribed semitrailer—14.5m; or
 - (ii) otherwise—12.3m.
- (2A) For the purposes of subsection (2), a semitrailer is a ***prescribed semitrailer*** if—
 - (a) the trailer is being—
 - (i) towed by a prime mover; and
 - (ii) used in a combination that is not a B-double or road train; and
 - (b) either—
 - (i) the combination is longer than 19m but not more than 20m; or
 - (ii) the distance from the front articulation point to the rear overhang line of the trailer is more than—
 - (A) for a trailer designed and constructed for the positive control of temperature through the use of refrigerated equipment and which otherwise complies dimensionally—9.9m; or
 - (B) otherwise—9.5m.
- (3) The part of a semitrailer or tag trailer, or anything attached to a semitrailer or tag trailer, in front of the trailer's front articulation point, other than another vehicle, must not protrude beyond the prescribed limit.
- (4) For the purposes of subsection (3), ***prescribed limit*** is an imaginary line created by drawing a semicircle of 1.9m radius from the centre of, and forward of, the front articulation point.

Example—

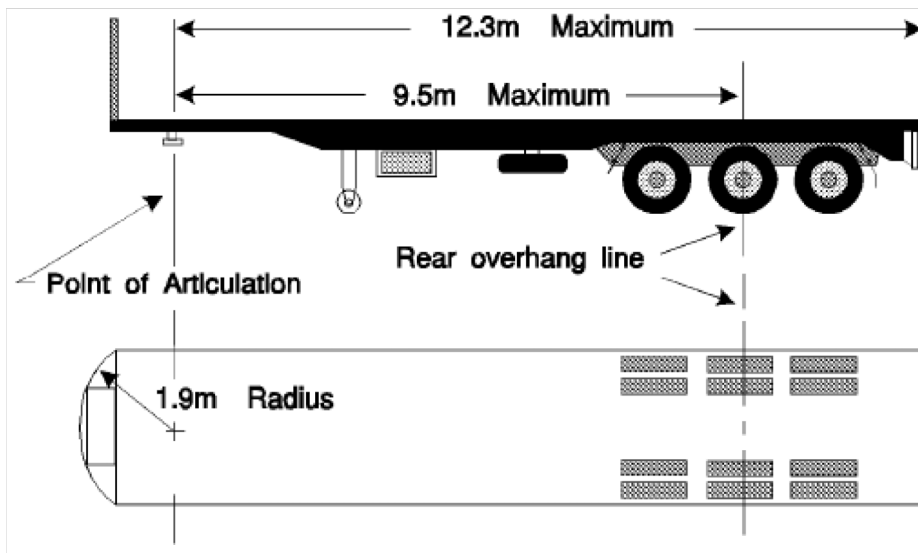


Measuring distances for subsections (2)(a)(ii), (b)(ii) and (4)

- (5) A semitrailer with more than 1 front articulation point must comply with subsections (2) and (3) when measured at one of the points.
- (5A) If a semitrailer has a front articulation point to the rear overhang line of more than 9.5m, the trailer must be fitted with side underrun protection complying with ADR106/00 or a later version of ADR106.
- (6) A trailer built to carry cattle, horses, pigs or sheep on 2 or more partly or completely overlapping decks must not have more than 12.5m of its length available to carry cattle, horses, pigs or sheep.
- (7) In a B-double built to carry cattle, horses, pigs or sheep, the 2 semitrailers must not have more than 18.8m of their combined length available to carry cattle, horses, pigs or sheep.
- (8) For subsections (6) and (7), the length available for the carriage of cattle, horses, pigs or sheep on a trailer is measured from the inside of the front wall or door of the trailer to the inside of the rear wall or door of the trailer, with any intervening partitions disregarded.


- (9) Despite subsection (2)(b)(ii), the distance from the front articulation point to the rear of a semitrailer may be up to 13.6m if the trailer—
- (a) is designed and constructed for the positive control of temperature through the use of refrigerated equipment; and
 - (b) has a distance from the front articulation point to the rear overhang line of not more than 9.9m; and
 - (c) does not operate in a B-double or road train combination; and
 - (d) otherwise complies dimensionally.

Example—

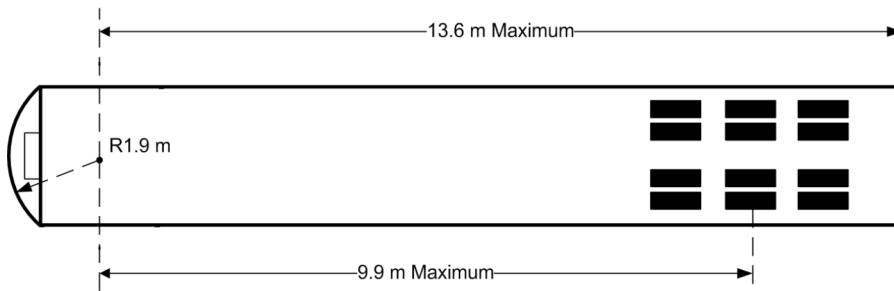

- (10) Despite subsection (2)(b)(ii), the distance from the front articulation point to the rear of the semitrailer may be up to 13.2m if the trailer—
- (a) has a distance from the front articulation point to the rear overhang line of not more than 9.5m; and
 - (b) does not operate in a B-double or road train combination; and
 - (c) otherwise complies dimensionally.

Example—

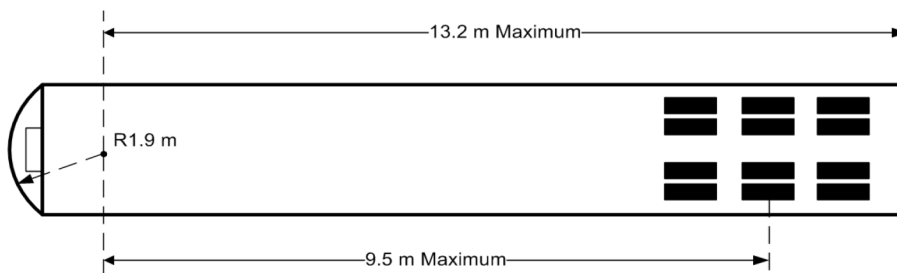

5 Length—rear overhang

- (1) The rear overhang of a heavy vehicle must not be more than the lesser of 3.7m and—
 - (a) for a combination that includes a semitrailer, dog trailer or tag trailer—60% of the distance between the trailer's front articulation point and its rear overhang line; or
 - (b) for a combination that includes another trailer—the distance between the front of the trailer's body or load carrying area and its rear overhang line; or
 - (c) for another vehicle—60% of the distance between the centre-line of the front axle and the rear overhang line.
- (1A) However, subsection (1B) applies in relation to a semitrailer being towed by a prime mover if—
 - (a) the combination is longer than 19m but not more than 20m; and
 - (b) the distance from the front articulation point to the rear overhang line of the trailer is more than—
 - (i) for a trailer designed and constructed for the positive control of temperature through the use of refrigerated equipment and which otherwise complies dimensionally—9.9m; or
 - (ii) otherwise—9.5m; and
 - (c) the distance from the front articulation point to the rear overhang line of the trailer complies with the maximum


distance stated in the Table in Part 4 of Schedule 6 in relation to the wheelbase of the prime mover.

- (1B) Despite subsection (1), the rear overhang of the semitrailer must not be more than the lesser of the following—
 - (a) 4m;
 - (b) the length that is 60% of the distance between the trailer's front articulation point and its rear overhang line.
- (2) A semitrailer or tag trailer with more than 1 front articulation point must comply with subsections (1)(a) and (1B) when measured at the same point that is used for measurement for compliance under section 4(4).
- (3) Despite subsection (1), if a vehicle built to carry vehicles (the *primary vehicle*) has at least 2 decks and a vehicle it is carrying overhangs its rear, the rear overhang of the primary vehicle must not be more than 4.9m.

6 Length—trailer drawbars

- (1) This section applies to a trailer that is, or forms part of, a heavy vehicle.
- (2) On a dog trailer, the distance between the coupling pivot point on the drawbar and the centre of the front axle group—
 - (a) must not be more than 5m; and
 - (b) if the trailer is used in a road train that is longer than 19m—must not be less than 3m.

Example—

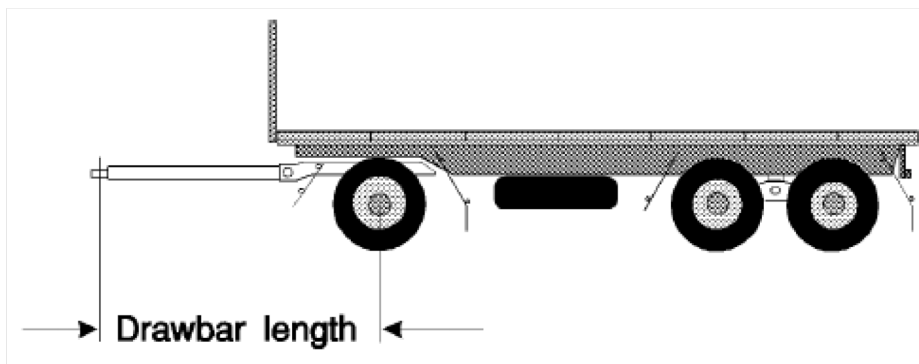

Measuring distance for subsection (2)

- (3) On a trailer, other than a semitrailer or tag trailer, with only 1 axle group, the distance between the coupling pivot point on the drawbar and the centre of the axle group must not be more than 8.5m.

6A Length—front blind spot mirror disregarded

For this Regulation, a front blind spot mirror, fitted to a heavy vehicle in accordance with section 13A of Schedule 2 to the *Heavy Vehicle (Vehicle Standards) National Regulation*, is to be disregarded for the purpose of measuring the length of the heavy vehicle unless the mirror projects more than 150mm beyond the overall length of the heavy vehicle.

6B Length—indirect vision devices disregarded

For this Regulation, an indirect vision device fitted to a heavy vehicle is to be disregarded for the purposes of measuring the length of the heavy vehicle under section 3 or 4—

- (a) if the device is fitted to the heavy vehicle under section 13C(a) of Schedule 2 of the *Heavy Vehicle (Vehicle Standards) National Regulation*; or
- (b) for a device fitted to the heavy vehicle under section 13C(b) of Schedule 2 of the *Heavy Vehicle*

(Vehicle Standards) National Regulation—unless the device projects more than 150mm beyond the overall length of the heavy vehicle.

6C Length—front end devices disregarded

- (1) For this Regulation, each of the following devices is to be disregarded for the purposes of measuring the length of a heavy vehicle if the device is fitted to the front end of the heavy vehicle—
 - (a) a prescribed device for indirect vision;
 - (b) a cross-view mirror, or any other device enabling the driver of the heavy vehicle to see objects in an area adjacent to the heavy vehicle, if the device does not protrude more than 250mm from the front end of the heavy vehicle;
 - (c) a monitoring device that—
 - (i) is fitted as part of an automated driving system or a close-proximity information system; and
 - (ii) does not protrude more than 250mm from the front end of the heavy vehicle.
- (2) In this section—

automated driving system, close-proximity information system, cross-view mirror and prescribed device for indirect vision have the same meanings as in section 8 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

front end means front end within the meaning of the ADR (Definitions and Vehicle Categories).

7 Width

- (1) A heavy vehicle must not be wider than 2.5m, unless it is—
 - (a) a safer freight vehicle; or
 - (b) a combination that includes a safer freight vehicle, together with its load, that is the only component vehicle wider than 2.5m.

- (2) For this Regulation, the width of a heavy vehicle must be measured in accordance with section 8 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

8 Height

- (1) A heavy vehicle must not be higher than—
- (a) for a vehicle built to carry cattle, horses, pigs or sheep—4.6m; or
 - (b) for a vehicle built with at least 2 decks for carrying vehicles—4.6m; or

Note—


An example is included under section 12(2).

- (ba) for a specified semitrailer—4.6m; or
 - (c) for a double-decker bus—4.4m; or
 - (d) for another vehicle—4.3m.
- (2) In this section—
- specified semitrailer*** has the same meaning as it has in section 153A(2) of the Law.

9 Ground clearance

- (1) A heavy vehicle must have a ground clearance of at least—
- (a) at a point within 1m of an axle—100mm; and
 - (b) at the midpoint between adjacent axles—one-thirtieth of the distance between the centre-line of each axle; and
 - (c) at any other point—the distance that allows the vehicle to pass over a peak in the road if the gradient on either side of the peak is 1:15.

Example—

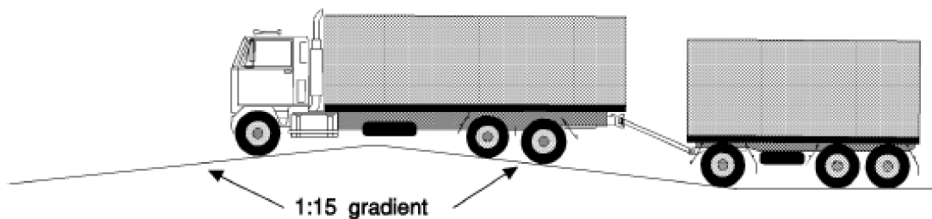

Measuring ground clearance for paragraph (c)

(2) In this section—

ground clearance, of a vehicle, means the minimum distance between the ground and the vehicle's underside, other than its tyres, wheels, wheel hubs, brake backing plates, flexible mudguards and mudflaps.

10 Axle configuration of B-doubles

The axle groups in a heavy combination that is a B-double with 2 tri-axle groups must be positioned so that the following formulae are complied with—

$$X - Y \leq 1$$


$$Y - X \leq 1.3$$

where—

X means the distance in metres (measured to the nearest tenth of a metre) between the centre-lines of the last axle of the B-double's prime mover and the first axle of its first semitrailer.

Y means the distance in metres (measured to the nearest tenth of a metre) between the centre-lines of the last axle of the B-double's first semitrailer and the first axle of its second semitrailer.

Example—

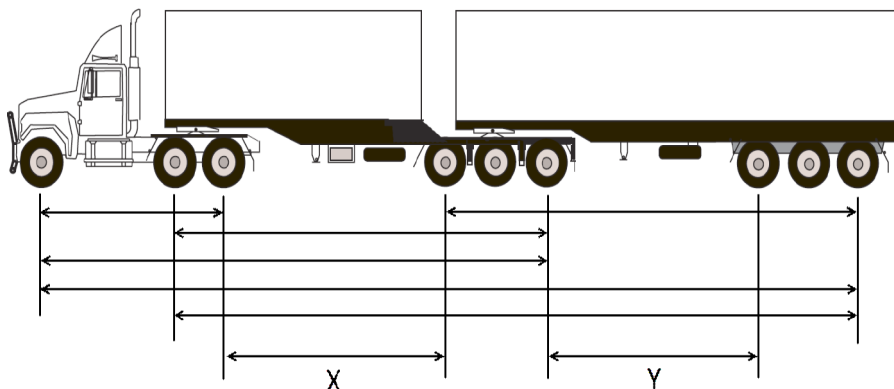

Part 3 Size and projection of loads

11 Definition for pt 3


In this Part—

load includes equipment and the pole of a pole-type trailer or jinker.

12 In relation to rear of load

- (1) The distance measured at right angles between the rear overhang line of a vehicle and the rear of any load it is carrying must not exceed the rear overhang that the vehicle is permitted under section 5.


Example—

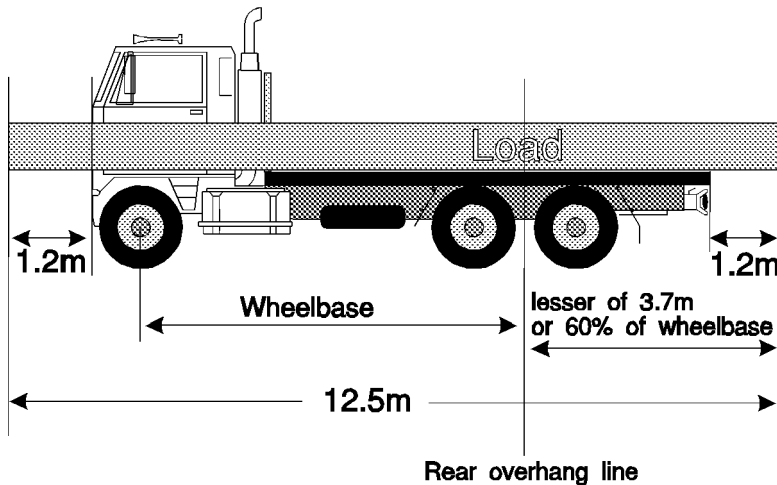

A vehicle complying with—

- the front projection limit under section 13; and
 - the rear overhang limit under section 5; and
 - the maximum rear projection of a load permitted without a warning signal under this Regulation.
- (2) Despite subsection (1), the distance measured at right angles between the rear overhang line of a trailer carrying vehicles on more than one deck and the rear of the rearmost vehicle on the trailer must not exceed 4.9m.

Example of maximum permitted dimensions of a loaded car carrier—

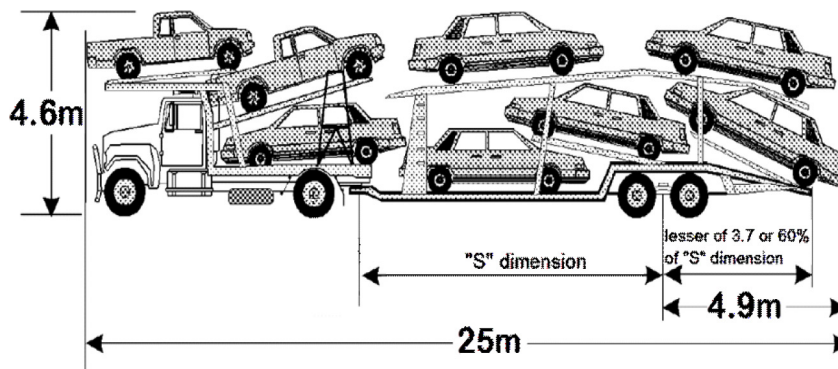

In the above example, the ‘S’ dimension is the distance between the trailer’s front articulation point and its rear overhang line.

Note—


The combined dimensions of a vehicle and its load must still meet the requirements of section 13 even if the load projects from the vehicle in any direction.

13 Front and side projection of load

A load on a heavy vehicle must not project—

- (a) for a heavy vehicle consisting of only a motor vehicle—
 - (i) more than 1.2m in front of the motor vehicle’s headlights; or
 - (ii) more than 150mm past the outer extremity of the motor vehicle on either side; or
- (b) for a heavy vehicle consisting of a motor vehicle and 1 or more trailers—
 - (i) more than 1.2m in front of the motor vehicle’s headlights; or
 - (ii) more than 150mm past the outer extremity on either the motor vehicle or the trailers on either side.

Example of maximum side projection of load—

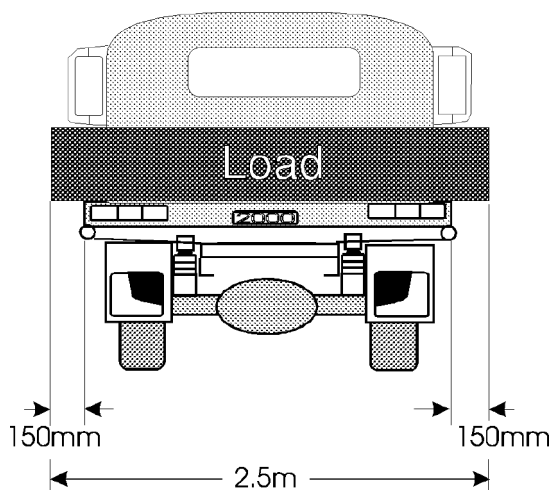

A vehicle loaded to width limits mentioned in section 7 with maximum side projection of load permitted under this section.

Notes—

- 1 The combined dimensions of a vehicle and its load must still meet the requirements of this section even if the load projects from the vehicle in any direction.
- 2 The example under section 12(1) shows the front projection limit.

Part 4 Trailer Length Table

Table—Maximum distance for semitrailer from front articulation point to rear overhang line in relation to wheelbase of prime mover

Wheelbase (m)		Maximum distance (m)
at least	less than	
3.5	4.1	10.5
4.1	4.3	10.4
4.3	4.4	10.3
4.4	4.6	10.2

Schedule 7

Wheelbase (m)		Maximum distance (m)
at least	less than	
4.6	4.8	10.1
4.8	4.9	10.0
4.9	5.1	9.9
5.1	5.2	9.8
5.2	5.4	9.7
5.4	5.5	9.6
5.5	5.6	9.5
5.6	5.8	9.4
5.8	5.9	9.3
5.9	6.0	9.2
6.0	6.2	9.1
6.2	6.3	9.0
6.3	6.4	8.9
6.4	6.5	8.8
6.5	6.6	8.7
6.6	—	8.6

**Schedule 7 Loading requirements and
loading performance standards**

section 38

1 Loading

- (1) A load on a heavy vehicle must not be placed in a way that makes the vehicle unstable or unsafe.

- (2) A load on a heavy vehicle must be secured so it is unlikely to fall or be dislodged from the vehicle.
- (3) An appropriate method must be used to restrain the load on a heavy vehicle.

2 Loading performance standards

- (1) A load on a heavy vehicle must be restrained by a load restraint system that—
 - (a) prevents the load from moving in relation to the heavy vehicle (other than movement allowed under subsection (2)) in the circumstances mentioned in subsection (3); and
 - (b) at a minimum, is capable of withstanding the forces that would result in the circumstances mentioned in subsection (3).
- (2) A load may move in relation to the heavy vehicle if—
 - (a) the vehicle's stability and weight distribution are not adversely affected by the movement; and
 - (b) the load does not become dislodged from the vehicle.

Examples of load movement that may be permitted under subsection (2)—

- a load contained within the sides or enclosure of the heavy vehicle that is restrained from moving horizontally may be able to move vertically
 - a load of very light objects, or a loose bulk load, that is contained within the sides or enclosure of the heavy vehicle may be able to move horizontally and vertically
 - a bulk liquid load contained within the sides or enclosure of the heavy vehicle
- (3) For subsection (1), the circumstances are that the loaded vehicle is subjected to—
 - (a) any of the following, separately—
 - (i) 0.8g deceleration in a forward direction;
 - (ii) 0.5g deceleration in a rearward direction;
 - (iii) 0.5g acceleration in a lateral direction; and

- (b) if friction or limited vertical displacement is relied on to comply with paragraph (a)—0.2g acceleration in a vertical direction relative to the load.
- (4) However, the heavy vehicle's load restraint system is taken to comply with subsection (1) for a journey if—
 - (a) a mass or dimension exemption is in force for the vehicle for the journey; and
 - (b) the vehicle complies with the mass or dimension exemption; and
 - (c) an engineer has given a certificate—
 - (i) describing the load restraint system; and
 - (ii) certifying that the load restraint system is suitable to safely restrain the load, taking into consideration the nature of the load and the conditions reasonably expected to be experienced during the journey; and
 - (d) the driver of the vehicle keeps a copy of the engineer's certificate in the driver's possession during the journey.

Note—

Mass or dimension exemptions are dealt with in Division 2 and Division 3 of Part 4.5 of the Law.

- (5) In this section—

chartered engineer means an individual who has been awarded chartered status by Engineers Australia.

engineer means a chartered engineer or a registered professional engineer.

g means gravitational acceleration and is equal to 9.81m/s².

registered professional engineer means an individual who is registered as a professional engineer by the Association of Professional Engineers Australia.

Schedule 8 Conditions of mass or dimension exemptions applying to class 1 heavy vehicles

section 39

Part 1 Exemptions granted by Commonwealth Gazette notice

Division 1 General conditions

1 Smallest practicable size of unloaded vehicle

A class 1 heavy vehicle that is not carrying goods must be kept at its smallest practicable dimensions, with any booms fully retracted.

2 Warning signs and flags

- (1) A class 1 heavy vehicle that, together with its load, is wider than 2.5m or longer than 25m must have—
 - (a) a warning sign attached to the front of the vehicle; and
 - (b) a warning sign attached to the rear of the vehicle or, if a load projects from the rear of the vehicle, to the rear of the load; and
 - (c) 4 brightly coloured red, red and yellow, or yellow flags, each at least 450mm by 450mm, fixed as follows—
 - (i) a flag must be attached at each side of the front of the vehicle or, if a load projects from the front of the vehicle, at each side of the front of the load;

- (ii) a flag must be fixed at each side of the rear of the vehicle or, if a load projects from the rear of the vehicle, at each side of the rear of the load; and
 - (d) if a load projects beyond a side of the vehicle—2 brightly coloured red, red and yellow, or yellow flags, each at least 450mm by 450mm, attached to the front and rear of each projecting side of the load at the outermost points.
- (2) A class 1 heavy vehicle that, together with its load, is not wider than 2.5m, and whose length is more than 22m but not more than 25m, must have a warning sign attached to the rear of the vehicle or, if a load projects from the rear of the vehicle, to the rear of the load.
- (3) Subsections (1) and (2) do not apply to—
 - (a) a heavy vehicle used in connection with the construction of a road and travelling within 1km of the relevant construction site, if a warning light is attached to the vehicle; or
 - (b) a tractor; or
 - (c) a rigid mobile crane less than 3.1m wide.
- (4) In this section—
construction, of a road, includes repair or maintenance of the road.

3 **Warning lights and delineators if load projecting from vehicle**

- (1) If a load projects more than 150mm beyond a side of a class 1 heavy vehicle, and the projection is less than 500mm thick from top to bottom—
 - (a) a warning light must be attached to the vehicle; and
 - (b) 2 delineators must be attached to the projection in the way stated in subsection (2) on each side of the vehicle on which the load projects more than 150mm.

-
- (2) For subsection (1)(b), the delineators must be attached in the following way on each side of the vehicle on which the load projects more than 150mm—
- (a) at least 1 delineator must be attached to the front of the projection and at least 1 delineator must be attached to the rear of the projection;
 - (b) a delineator attached to the front of the projection must be attached so that its reflective surface is facing forward of the vehicle;
 - (c) a delineator attached to the rear of the projection must be attached so that its reflective surface is facing rearward from the vehicle.
- (3) In this section—
- delineator*** means a yellow, rigid piece of material commonly known as a ‘delineator’ that—
- (a) is at least 300mm long and at least 300mm wide; and
 - (b) complies with class 1, 2, 400 or 100 of the version of AS/NZS 1906 ‘Retroreflective materials and devices for road traffic control purposes’ applying to the delineator at the delineator’s date of manufacture.

4 Warning lights for wide vehicles used in daytime

If a class 1 heavy vehicle is, together with any load, wider than 3m, a warning light must be attached to the vehicle while it is being used in the daytime.

5 Side and rear markers and warning lights for oversize vehicles used at night

- (1) If a class 1 heavy vehicle that is an oversize vehicle is being used at night—
- (a) side markers must be displayed—
 - (i) not more than 2m apart along the total length of each side of the vehicle and any load projecting from the front or rear of the vehicle; and

- (ii) at each corner of any load projecting from the front or rear of the vehicle; and
 - (b) 2 rear markers must be fitted to the rear of any load projecting from the rear of the vehicle, within 400mm of each side of the load and at least 1m but not more than 2.1m above the ground; and
 - (c) a warning light must be attached to the vehicle if it, together with any load, is wider than 2.5m or longer than 22m.
- (2) In this section—

rear markers means red lights known as ‘rear markers’.

side markers means lights showing yellow to the front and red to the rear and known as ‘side markers’.

6 Headlights

- (1) This section applies to a class 1 heavy vehicle that is an oversize vehicle, or the towing vehicle of a class 1 heavy vehicle that is an oversize vehicle, that is required to have headlights under the *Heavy Vehicle (Vehicle Standards) National Regulation*.
- (2) The class 1 heavy vehicle, or the towing vehicle, must have its low-beam headlights on while it is being used in the daytime.
- (3) In this section—

low-beam, for a headlight fitted to a heavy vehicle, has the meaning it has for the purposes of the *Heavy Vehicle (Vehicle Standards) National Regulation*.

7 Travel restrictions at night

A class 1 heavy vehicle that, together with any load, is wider than 3.1m or longer than 22m, must not, while being used at night—

- (a) travel outside an urban area; or
- (b) travel in an urban area without being accompanied by a pilot vehicle.

8 No travelling if low visibility

- (1) A class 1 heavy vehicle must not begin to travel if, due to circumstances such as fog, heavy rain, smoke, dust or insect plague—
 - (a) visibility is less than 250m in the daytime; or
 - (b) the headlights of a vehicle approaching within 250m could not be seen at night.
- (2) If a class 1 heavy vehicle is already travelling when visibility is reduced to the level mentioned in subsection (1), the vehicle's driver must drive the vehicle into the nearest safe parking area and wait until visibility improves beyond that level before continuing to travel.
- (3) In this section—

safe parking area, for a class 1 heavy vehicle, means an area at which vehicles of that kind may be parked lawfully and safely.

9 Minimum following distance

- (1) The person driving a class 1 heavy vehicle that is an oversize vehicle must drive at least 200m behind another oversize vehicle travelling in front of it, unless the person is—
 - (a) driving on—
 - (i) a multi-lane road; or
 - (ii) a length of road in a built-up area; or
 - (b) overtaking.
- (2) In this section—

built-up area has the meaning it has for the purposes of the Road Rules.

multi-lane road has the meaning it has for the purposes of the Road Rules.

10 Allowing overtaking

- (1) This section applies if a class 1 heavy vehicle is being driven on a road, or a part of a road, that does not have a separate lane for overtaking vehicles.
- (2) The person driving the class 1 heavy vehicle must, at regular intervals and to the extent reasonably practicable, move the vehicle off the road to allow other vehicles to overtake it.

11 Assessing routes

- (1) Before a class 1 heavy vehicle is driven along any route, its driver and operator must be satisfied that the route has been assessed and that the vehicle can be driven along it without contravening subsection (2).
- (2) A class 1 heavy vehicle must not be driven along a route if to do so would be likely to cause—
 - (a) disruption to telecommunication, electricity, rail, gas, water or sewage services (*relevant services*); or
 - (b) damage to a road (including a bridge), structure, rail crossing or tree (*relevant property*).
- (3) Subsection (2) does not apply if the entity responsible for the relevant services or relevant property has given permission for the vehicle to travel along the route, and the vehicle is driven in accordance with the permission.
- (4) To remove any doubt, it is declared that a mass or dimension exemption is not permission for the purpose of subsection (3).

Division 2 Load-carrying vehicles

12 Application of Div 2

- (1) This Division applies only to a class 1 heavy vehicle that is a load-carrying vehicle.
- (2) A reference in this Division to a load-carrying vehicle is taken to be a reference to a load-carrying vehicle that is a class 1 heavy vehicle.

13 Carrying goods in addition to a large indivisible item

- (1) A load-carrying vehicle must not carry more than 1 large indivisible item unless—
 - (a) the vehicle together with its load complies with the general mass limits; and
 - (b) the vehicle carrying more than 1 large indivisible item does not cause the vehicle together with its load to exceed a prescribed dimension requirement that would not be exceeded if the vehicle carried only 1 of the large indivisible items.
- (2) A load-carrying vehicle carrying 1 or more large indivisible items must not carry any other goods unless—
 - (a) the vehicle together with its load complies with the general mass limits; and
 - (b) the other goods are contained within the limits set by the prescribed dimension requirements.
- (3) Despite subsection (2), a load-carrying vehicle carrying a special purpose vehicle or agricultural vehicle may also carry equipment, tools, substances or detached parts to be used in conjunction with the vehicle being carried.
- (4) In this section—

large indivisible item has the meaning it has under section 116(4) of the Law.

14 Towing a low loader dolly with an unladen low loader

- (1) An unladen low loader must not be towed in a combination with a low loader dolly unless—
 - (a) the combination is 2.5m wide or less or the combination is a safer freight combination; and
 - (b) it would be unreasonable to require the dolly to be loaded onto the low loader because of the short distance to be travelled, or special difficulties in loading or unloading the dolly due to the nature of the location where the loading or unloading is to take place.

- (2) In this section—

safer freight combination means a combination that includes a safer freight vehicle, together with its load, that is the only component vehicle wider than 2.5m.

Division 3 Special purpose vehicles

15 Application of Div 3

- (1) This Division applies only to a class 1 heavy vehicle that is a special purpose vehicle.
- (2) A reference in this Division to a special purpose vehicle is taken to be a reference to a special purpose vehicle that is a class 1 heavy vehicle.

16 Side lights for travel at night with long front projections

- (1) When travelling at night, a special purpose vehicle with a projection extending more than 1.2m in front of the vehicle must have a yellow light fixed on each side of the projection.
- (2) The light must be—
 - (a) fixed as far forward as possible, and shielded from the driver's view; and
 - (b) visible to any traffic approaching the vehicle from its front; and
 - (c) visible to any traffic approaching the vehicle from the side on which it is fixed.

17 Rear marking plates and warning patterns

- (1) A rear marking plate must be fitted to the rearmost part of the body of a special purpose vehicle.
- (2) A warning pattern must be displayed on the left and right sides of any rigid projection extending more than 1.2m in front of the body of a special purpose vehicle.

(3) In this section—

rear marking plate means a plate that—

- (a) warns other road users that the vehicle to which the plate is attached is an oversize vehicle; and
- (b) complies with the ‘VSB 12—National Code of Practice—Rear Marking Plates’ published by the Regulator.

Note—

A copy of the ‘VSB 12—National Code of Practice—Rear Marking Plates’ is available on the Regulator’s website at www.nhvr.gov.au.

18 Prohibition on towing other vehicles

A special purpose vehicle must not tow a vehicle.

Division 4 Agricultural vehicles

19 Application of Div 4

- (1) This Division applies only to a class 1 heavy vehicle that is an agricultural vehicle or agricultural combination.
- (2) A reference in this Division to an agricultural vehicle or agricultural combination is taken to be a reference to an agricultural vehicle or agricultural combination that is a class 1 heavy vehicle.

20 Warning devices for agricultural vehicles or combinations

- (1) An agricultural vehicle or agricultural combination wider than 2.5m, or an agricultural combination longer than 22m, must have a warning light attached to its highest practicable point when it is on a major road.
- (2) A warning sign must be attached to the rear of an agricultural implement being towed by a tractor.

- (3) A warning pattern must be displayed at the sides of the rear of any auger, conveyor, or the reaping implement of a combine harvester.
- (4) Any part of an axle extending more than 150mm from the outside wall of a tractor's tyre must be painted fluorescent yellow or have yellow fluorescent or other high-visibility material wrapped around it.
- (5) In this section—
combine harvester means an agricultural vehicle that simultaneously performs operations of reaping, threshing and winnowing grain crops.

21 Pilot vehicle requirements for agricultural vehicles or combinations

- (1) An agricultural vehicle or agricultural combination wider than 3.7m but not wider than 4.5m must be accompanied by at least 1 pilot vehicle if—
 - (a) any part of the terrain in which it is being used limits a clear view of approaching traffic to less than 500m; or
 - (b) it is being used on a major road.
- (2) An agricultural vehicle or agricultural combination wider than 4.5m—
 - (a) must be accompanied by at least 1 pilot vehicle unless paragraph (b) applies; and
 - (b) must be accompanied by at least 2 pilot vehicles if—
 - (i) any part of the terrain in which it is being used limits a clear view of approaching traffic to less than 500m; or
 - (ii) it is being used on a major road.
- (3) Despite subsections (1) and (2), an agricultural vehicle or agricultural combination does not have to be accompanied by a pilot vehicle if it is travelling less than 500m.

22 Agricultural vehicles or combinations not to be used on freeway

- (1) An agricultural vehicle or agricultural combination must not be used on a freeway.
- (2) In this section—
freeway has the meaning it has for the purposes of the Road Rules.

23 Agricultural implements not to carry goods or passengers

An agricultural implement must not carry goods or passengers.

24 Speed limits for agricultural implements without brakes

An agricultural implement without brakes must not be towed by a vehicle at a speed greater than the lesser of the following—

- (a) 20km/hr less than the speed limit applying to the vehicle under the Road Rules;
- (b) 50km/hr.

Division 5 Pilot and escort vehicles**25 Application of Div 5**

- (1) This Division—
 - (a) applies if, under a condition in Divisions 1 to 4, a class 1 heavy vehicle must be accompanied by a pilot vehicle or escort vehicle; and
 - (b) prescribes requirements about the pilot vehicle or escort vehicle or its operation.
- (2) A reference in this Division to a pilot vehicle or escort vehicle is taken to be a reference to a pilot vehicle or escort vehicle

accompanying a class 1 heavy vehicle under a condition in Divisions 1 to 4.

26 Requirements for a pilot vehicle

- (1) A pilot vehicle must have at least 4 wheels and a GVM of—
 - (a) no more than 4.5t unless paragraph (b) applies; or
 - (b) if the pilot vehicle is the rear pilot vehicle of 2 pilot vehicles that are required to accompany a class 1 heavy vehicle—no more than 6.5t.
- (2) A pilot vehicle must have a warning sign attached to its roof.
- (3) A pilot vehicle must only have a warning light attached—
 - (a) above or below the warning sign; or
 - (b) at each side of the warning sign.

27 Requirements for an escort vehicle

- (1) An escort vehicle must have—
 - (a) at least 4 wheels; and
 - (b) a GVM of 4.5t or less; and
 - (c) 1 or 2 warning lights on its roof.
- (2) If the vehicle is a police vehicle or transport enforcement vehicle, the warning light, instead of flashing yellow, may flash a colour that a light on the roof of an exempt vehicle is required or permitted to be under section 79 of Schedule 2 of the *Heavy Vehicle (Vehicle Standards) National Regulation*.
- (3) This section does not apply to an escort vehicle that is a motor cycle driven by a police officer in the course of the officer's duty.

28 Headlights on a pilot or escort vehicle

- (1) The low-beam headlights on a pilot vehicle or escort vehicle must be switched on when it is accompanying a class 1 heavy vehicle during the daytime.

(2) In this section—

low-beam, for a headlight fitted to a pilot vehicle or escort vehicle, has the meaning it has—

- (a) if the pilot vehicle or escort vehicle is a heavy vehicle—in section 4 of the *Heavy Vehicle (Vehicle Standards) National Regulation*; or
- (b) otherwise—for the purposes of the provisions of the light vehicle standards prescribing requirements about the headlights of the vehicle.

29 Restriction on what a pilot or escort vehicle may carry

A pilot vehicle or escort vehicle must not tow a trailer or carry goods, but it may carry equipment or substances for use in connection with the class 1 heavy vehicle it is accompanying or for restraining a load on that heavy vehicle.

30 Where a pilot vehicle must be driven

- (1) If 1 pilot vehicle accompanies a class 1 heavy vehicle, the pilot vehicle must travel—
 - (a) behind the heavy vehicle if they are on a divided road; or
 - (b) in front of the heavy vehicle if they are on a road that is not divided.
- (2) If 2 pilot vehicles accompany a class 1 heavy vehicle, 1 pilot vehicle must travel in front of the heavy vehicle, and the other behind it.
- (3) A pilot vehicle must travel far enough away from the class 1 heavy vehicle it is accompanying to give adequate warning to other road users of the presence of the heavy vehicle, taking into account traffic speed, weather, visibility and other driving conditions.

31 Communication between drivers

- (1) A class 1 heavy vehicle and any accompanying pilot vehicle or escort vehicle must have a device that allows the drivers to communicate effectively with each other.
- (2) Subsection (1) does not apply—
 - (a) if the class 1 heavy vehicle is—
 - (i) an agricultural machine; or
 - (ii) a heavy combination that includes an agricultural machine; or
 - (b) in relation to a class 1 heavy vehicle accompanied by an escort vehicle that is a police vehicle.

Part 2 Exemptions granted by issuing a permit

32 Application of Pt 2

- (1) This Part applies only to a class 1 heavy vehicle that is a special purpose vehicle.
- (2) A reference in this Part to a special purpose vehicle is taken to be a reference to a special purpose vehicle that is a class 1 heavy vehicle.

33 Restriction on towing other vehicles

- (1) A special purpose vehicle must not tow a vehicle.
- (2) Subsection (1) does not apply to a crane towing a single trailer if—
 - (a) the crane has no more than 5 axles; and
 - (b) the load on the trailer includes only equipment required for the normal operation of the crane; and
 - (c) the swept path of the combination consisting of the crane and trailer turning a corner is not greater than

what the swept path of the crane alone turning a corner would be.

Part 3 All mass or dimension exemptions

Division 1 Warning lights

34 Application of Div 1

(1) This Division—

- (a) applies if a class 1 heavy vehicle, or a pilot vehicle or escort vehicle accompanying a class 1 heavy vehicle, must have 1 or more warning lights on it under a condition of the mass or dimension exemption under which the class 1 heavy vehicle is being used; and

Note—

Part 1 prescribes conditions about warning lights for class 1 heavy vehicles, or pilot vehicles or escort vehicles accompanying class 1 heavy vehicles, being used under a mass or dimension exemption granted by Commonwealth Gazette notice.

- (b) prescribes requirements about the warning lights.
- (2) A reference in this Division to a pilot vehicle or escort vehicle is taken to be a reference to a pilot vehicle or escort vehicle accompanying a class 1 heavy vehicle.

35 Characteristics of warning light

- (1) A warning light attached to a class 1 heavy vehicle, pilot vehicle or escort vehicle, when switched on, must—
 - (a) emit a yellow coloured light of rotating and flashing effect; and
 - (b) flash between 120 and 200 times a minute; and
 - (c) have a power of at least—

- (i) if LED technology is used—24W; or
 - (ii) if another technology is used—55W; and
- (d) not be a strobe light.
- (2) However, subsection (1) does not apply to a warning light that—
 - (a) is attached to an escort vehicle that is a police vehicle or transport enforcement vehicle; and
 - (b) complies with the requirements of the light vehicle standards for lights attached to a vehicle of that kind.

36 Visibility of warning lights

- (1) A warning light attached to a class 1 heavy vehicle, pilot vehicle or escort vehicle must be—
 - (a) clearly visible at a distance of 500m in all directions; or
 - (b) supplemented by 1 or more additional warning lights so that the light emanating from at least 1 of them is clearly visible at a distance of 500m in any direction.
- (2) However, for a pilot vehicle travelling in front of a class 1 heavy vehicle, a filter may be placed behind the warning light attached to the pilot vehicle to reduce the intensity of the light directed to the driver of the heavy vehicle.

37 Switch for warning lights to be within easy reach

The switch for a warning light attached to a class 1 heavy vehicle, pilot vehicle or escort vehicle must be within easy reach of the driver in the normal driving position in the vehicle.

38 Warning lights to be on if required, and off if not

- (1) A warning light attached to a class 1 heavy vehicle must only be switched on when the heavy vehicle is travelling, or is stationary in a position that is likely to cause danger to other road users.

- (2) A warning light attached to a pilot vehicle or escort vehicle must be switched on when the vehicle is travelling and accompanying a class 1 heavy vehicle.

Division 2 Warning signs

Subdivision 1 Preliminary

39 Application of Div 2

- (1) This Division—
- (a) applies if a class 1 heavy vehicle, or a pilot vehicle accompanying a class 1 heavy vehicle, must have 1 or more warning signs on it under a condition of the mass or dimension exemption under which the class 1 heavy vehicle is being used; and

Note—

Part 1 prescribes conditions about warning signs for class 1 heavy vehicles, or pilot vehicles accompanying class 1 heavy vehicles, being used under a mass or dimension exemption granted by Commonwealth Gazette notice.

- (b) prescribes requirements about the warning signs.
- (2) A reference in this Division to a pilot vehicle is taken to be a reference to a pilot vehicle accompanying a class 1 heavy vehicle.

Subdivision 2 Class 1 heavy vehicles and pilot vehicles

40 Application of Sdiv 2

This Subdivision applies to both warning signs required to be on a class 1 heavy vehicle and warning signs required to be on a pilot vehicle accompanying a class 1 heavy vehicle.

41 Face of warning sign

The face of a warning sign on a class 1 heavy vehicle or pilot vehicle must have—

- (a) a yellow surface complying with class 1, 2, 400 or 100 of the version of AS/NZS 1906 ‘Retroreflective materials and devices for road traffic control purposes’ applying to the warning sign at the sign’s date of manufacture; and
- (b) a black border that is at least 20mm wide and, unless the sign has been made with a box edge, whose outermost edge is at least 10mm in from the edge of the sign; and
- (c) its manufacturer’s name or trademark, and the brand and class of material used for the warning sign’s surface, permanently marked in letters at least 3mm but no more than 10mm high—
 - (i) for a class 1 heavy vehicle—on any visible part of the sign; or
 - (ii) for a pilot vehicle—on any visible part of the sign other than a bottom corner.

42 Other specifications for warning signs

A warning sign on a class 1 heavy vehicle or pilot vehicle must—

- (a) be manufactured from a material appropriate to its intended use on the vehicle; and
- (b) be fitted so that the sign is unlikely to become dislocated or furl; and
- (c) be displayed so that the entire sign is clearly visible; and
- (d) be maintained so that it can be easily read by other road users.

Subdivision 3 Class 1 heavy vehicles only

44 Application of Sdiv 3

This Subdivision applies only to warning signs required to be on a class 1 heavy vehicle.

45 Size of warning sign

- (1) A warning sign on a class 1 heavy vehicle must be at least 1200mm long and at least 450mm high.
- (2) The length of a warning sign on a class 1 heavy vehicle may be split into 2 parts, in which case the combined length of its parts must be at least 1200mm.

46 Face of warning sign


- (1) A warning sign on a class 1 heavy vehicle must show the word ‘OVERSIZE’, in black capital letters, and in typeface Series C(N) complying with AS 1744 ‘Forms of Letters and Numerals for Road Signs’.

Note—

AS 1744 ‘Forms of Letters and Numerals for Road Signs’ may be purchased from Standards Australia at <www.standards.org.au>.

- (2) The letters must be—
 - (a) at least 200mm high; and
 - (b) at least 125mm from the top and bottom of the warning sign.
- (3) If the length of the warning sign is split into 2 parts—
 - (a) the part fitted on the left must show the word ‘OVER’ and the part fitted on the right must show the word ‘SIZE’; and
 - (b) there must be no border between the 2 parts, despite section 41(b).

Example of a warning sign for an oversize vehicle or combination—

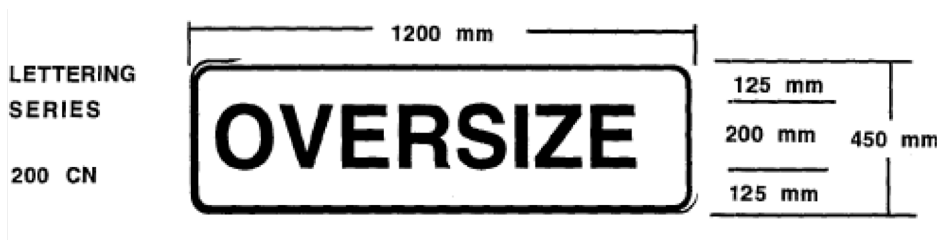

47 Fitting warning sign

- (1) A warning sign on a class 1 heavy vehicle must be fitted horizontally.
- (2) The lower edge of the warning sign must be—
 - (a) above the bottom of the bumper bar; or
 - (b) if there is no bumper bar—at least 500mm above ground level.
- (3) If the length of the warning sign is split into 2 parts, each part must be fitted at the same height as the other.

Subdivision 4 Pilot vehicles only

48 Application of Sdiv 4

This Subdivision applies only to warning signs required to be on a pilot vehicle accompanying a class 1 heavy vehicle.

49 Size and shape of warning sign

- (1) A warning sign on a pilot vehicle must be at least 1200mm long and at least 600mm high.
- (2) The warning sign may have bottom corner cut-outs not more than 150mm wide and not more than 100mm high if they are needed for fitting the warning sign to the pilot vehicle.

50 Faces of warning sign

- (1) Both faces of a warning sign on a pilot vehicle must show—
 - (a) the word ‘OVERSIZE’, in black capital letters at least 200mm high, and complying with AS 1744 ‘Forms of Letters and Numerals for Road Signs’, in typeface Series C(N); and
 - (b) the words ‘LOAD AHEAD’, in black capital letters at least 100mm high, and complying with AS 1744 ‘Forms of Letters and Numerals for Road Signs’, in typeface Series D(N).

Note—

AS 1744 ‘Forms of Letters and Numerals for Road Signs’ may be purchased from Standards Australia at <www.standards.org.au>.

- (2) The bottom of the letters of the word ‘OVERSIZE’ must be at least 300mm from the bottom of the warning sign.
- (3) The bottom of the letters of the words ‘LOAD AHEAD’ must be at least 100mm from the bottom of the warning sign.


Example of a warning sign for a pilot vehicle—



51 Fitting warning sign

A warning sign on a pilot vehicle must not lean back so that there is more than 200mm measured horizontally from the top of the sign to a vertical line running through the bottom of the sign.

Example—

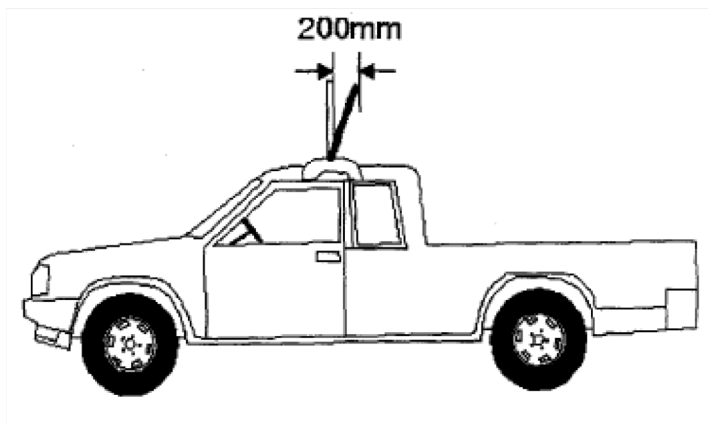

maximum slant of warning sign

Schedule 9 Imposition of road conditions in relation to a class 2 heavy vehicle

section 44

Kind of road condition	Circumstances for imposing the kind of road condition
requirements about the types of loads that a heavy vehicle may carry	if an area or route is not suitable for access by all or stated categories of class 2 heavy vehicles but access is needed for vehicles that service an industry local to the area or route to carry specified loads, such as grain or sugar cane
restrictions on turning in a given direction	if the road alignment or geometry is not conducive to all or stated categories of class 2 heavy vehicles making a turn in a given direction safely or without undue risk to road infrastructure

Schedule 9

Kind of road condition	Circumstances for imposing the kind of road condition
requirements about the permissible mass of a heavy vehicle (including its equipment) or a component or load of a heavy vehicle, including for specified axles or axle groups or axle spacings, including requirements about maximum or minimum mass limits or for the vehicle to be unladen or for the stated category of class 2 heavy vehicle to not be able to be used at higher mass limits on a stated area or route	if it is necessary to protect road infrastructure from excessive rates of wear and damage caused by excessive mass if it is necessary to protect road infrastructure from mass that is insufficient to ensure that drive axles maintain traction with the road pavement if specifying vehicle load distribution is necessary to protect road infrastructure from excessive rates of wear or damage by ensuring adequate drive axle traction on steep inclines

Kind of road condition	Circumstances for imposing the kind of road condition
conditions about which lane or lanes a heavy vehicle may or may not be used on	if there is a demonstrated and significant elevated risk of wear or damage to road infrastructure relative to travelling in another lane or lanes in a specified area or route if a significant benefit to road infrastructure will result from imposing the condition, such as travelling through roundabouts or helping to prevent collision with roadside furniture, poles and signs if a reduction in traffic congestion will result from imposing the condition if a specified section of road has been assessed as unsafe for all or stated categories of class 2 heavy vehicles to overtake other vehicles and it is necessary to restrict such vehicles to operating in specified lanes
requirements about minimum spacing between all or stated categories of class 2 heavy vehicles when travelling on a specified area or route	if there is a demonstrated and significant elevated risk of wear or damage to road infrastructure arising from all or stated categories of class 2 heavy vehicles travelling in close proximity to other class 2 heavy vehicles if road conditions make attempts by other motorists to overtake all or stated categories of class 2 heavy vehicles more likely (such as on inclines where the heavy vehicles may be unable to keep pace with general traffic), but where travelling in close proximity to other heavy vehicles would make such overtaking attempts more difficult or less safe

Schedule 9

Kind of road condition	Circumstances for imposing the kind of road condition
restrictions on proceeding past a nominated point on a road until the driver has ascertained that it is safe to do so	if there are sections of road with limited forward visibility and insufficient width for more than one vehicle to pass safely, including narrow stretches of road and single lane bridges
conditions about the maximum speed at which all or stated categories of class 2 heavy vehicles may be driven in or on a stated area, road or route, being lower than the speed limit applying to other traffic in that area	if there are sections of road in an area that is built up or within town limits with high pedestrian or vehicle traffic and the use of all or stated categories of class 2 heavy vehicles at the speed limit applying to other traffic in that area is a greater safety risk than for other vehicle categories if it is necessary to minimise wear and damage to unsealed road surfaces when wet or dusty or in other poor weather conditions if there is an elevated risk of loss of vehicle control, including from steep or winding descents if there is an elevated risk to road safety generally if a route is a school bus route

Kind of road condition	Circumstances for imposing the kind of road condition
requirements to yield to other vehicles, being in addition to requirements under the Road Rules	if it is necessary to manage traffic flow to minimise traffic congestion, such as in ferry boarding and unloading areas where priority loading or parking is required if it is necessary to manage traffic flow on narrow roads to allow another vehicle to pass or at intersections where all or stated categories of class 2 heavy vehicles may need to use opposing traffic lanes to negotiate a corner if road infrastructure or traffic conditions make overtaking all or stated categories of class 2 heavy vehicles unsafe or where it would contribute to increased traffic congestion, such as where the heavy vehicle was unable to keep pace with general traffic (for example, on steep inclines)
restrictions on travelling during stated periods or stated weather conditions	during the wet season when roads in an area or route are in such condition that it would be unsafe for all or stated categories of class 2 heavy vehicles to be used on those roads or where such use would contribute to unacceptable damage to road infrastructure if there are specified weather conditions and it would be unsafe for all or stated categories of class 2 heavy vehicles to be used on roads in an area or route or where such use would contribute to unacceptable damage to road infrastructure

Schedule 10 Reviewable decisions

section 45

Part 1 Decisions of the Regulator

Section under which decision made	Description of decision
section 20	decision of Regulator not to issue an HML permit other than because a relevant road manager for the permit did not consent to the issue
section 20	decision of Regulator to issue an HML permit for a period less than the period of not more than 3 years sought by the applicant
section 24	decision of Regulator to impose on an HML permit a condition not sought by the applicant and not a road condition required by a relevant road manager for the permit
section 29	decision of Regulator to amend or cancel an HML permit
section 35	decision of Regulator not to give a replacement permit for an HML permit
section 38E	decision of Regulator to impose on a class 2 heavy vehicle authorisation (permit) a condition not sought by the applicant and not a road condition or travel condition required by a relevant road manager for the permit

Section under which decision made	Description of decision
section 38F	decision of Regulator to impose on a mass or dimension exemption (permit) a condition not sought by the applicant and not a road condition or travel condition required by a relevant road manager for the permit
section 38H	decision of a relevant road manager for a mass or dimension exemption (permit), that is a public authority, to request the amendment or cancellation of the permit
section 38I	decision of Regulator to immediately suspend a mass or dimension authority granted by giving a person a permit

Part 2 Decisions of relevant road managers

Section under which decision made	Description of decision
section 23	decision of a relevant road manager for an HML permit, that is a public authority, not to consent to the issue of the permit
section 23	decision of a relevant road manager for an HML permit, that is a public authority, to consent to the issue of the permit on the condition that a road condition be imposed on the permit
section 31	decision of relevant road manager for an HML permit, that is a public authority, to request the amendment or cancellation of an HML permit